


ARR Indust X7R HT200C, Ceramic, 200C, 0.068 uF, 20%, 25 VDC, X7R, Commercial, High Temperature, Lead Spacing = 5.08mm

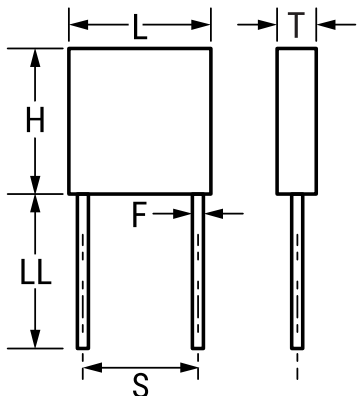

| General Information | |
|--------------------------|------------------------------|
| Supplier: | KEMET |
| Series: | ARR Indust X7R HT200C |
| Style: | Radial |
| Description: | Commercial, High Temperature |
| Features: | Commercial |
| RoHS: | No |
| Termination: | Gold |
| Testing and Reliability: | Standard |

| Dimensions | |
|------------|--------------------|
| L | 5.08mm MAX |
| H | 5.08mm MAX |
| T | 2.54mm MAX |
| S | 5.08mm +/-0.76mm |
| LL | 31.75mm MIN |
| F | 0.508mm +/-0.051mm |

| Specifications | |
|--------------------------|-----------|
| Capacitance: | 0.068 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 25 VDC |
| Temperature Range: | -55/+200C |
| Temperature Coefficient: | X7R |

| Packaging Specifications | |
|--------------------------|-----------|
| Packaging: | Bulk, Bag |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.