

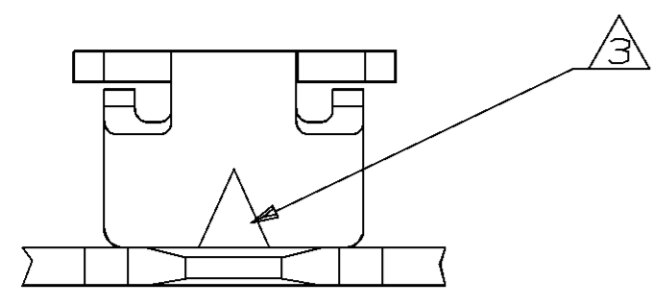
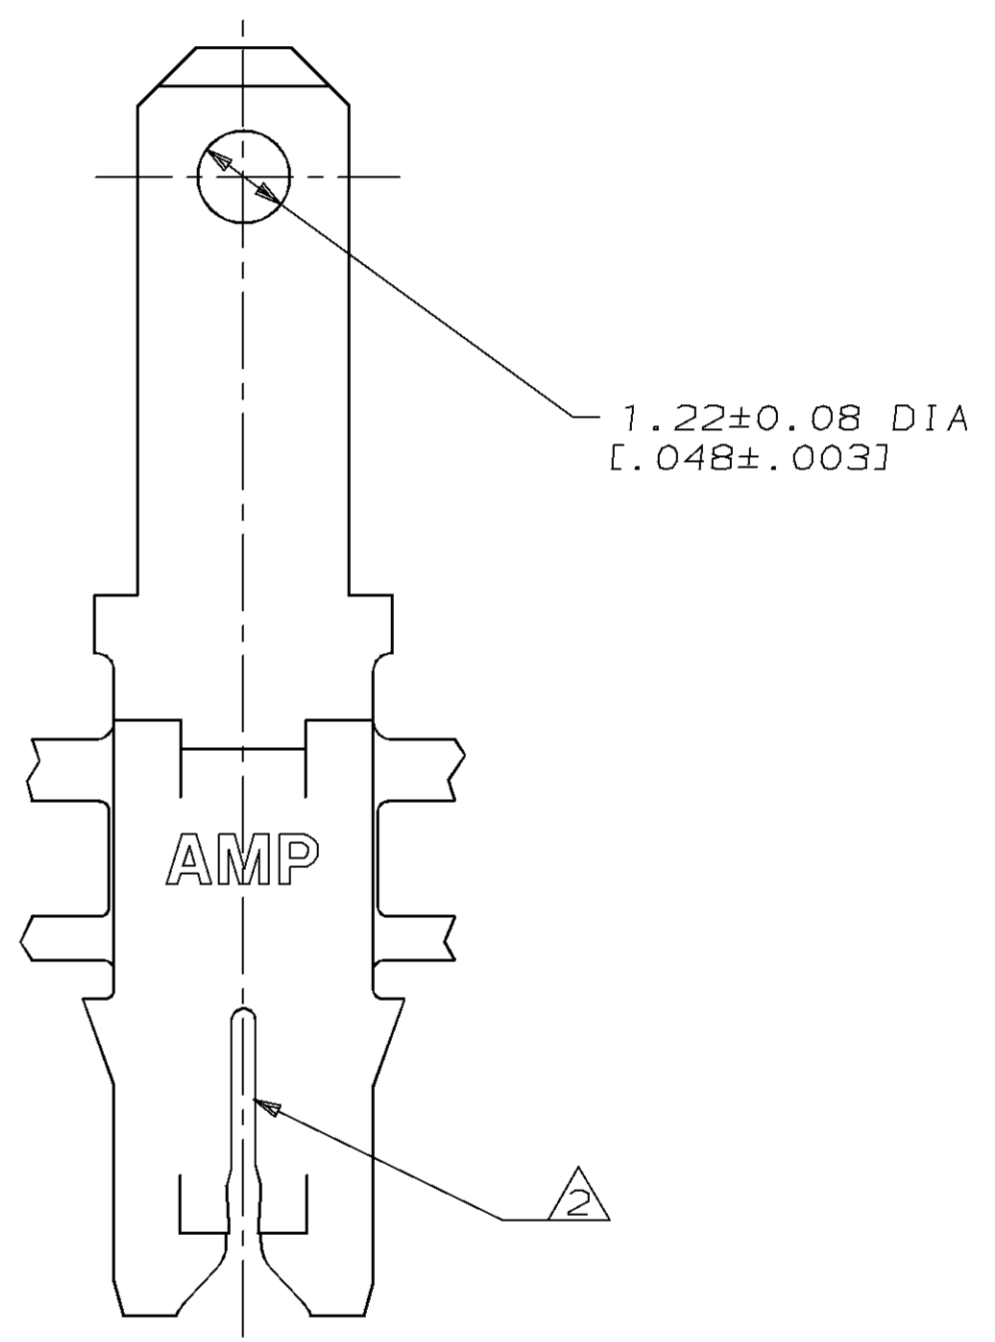


LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
AF	50	P	F			F		ADDED -2 & REDRAWN 0710-0606-94	03/DEC/94	MF/NN	

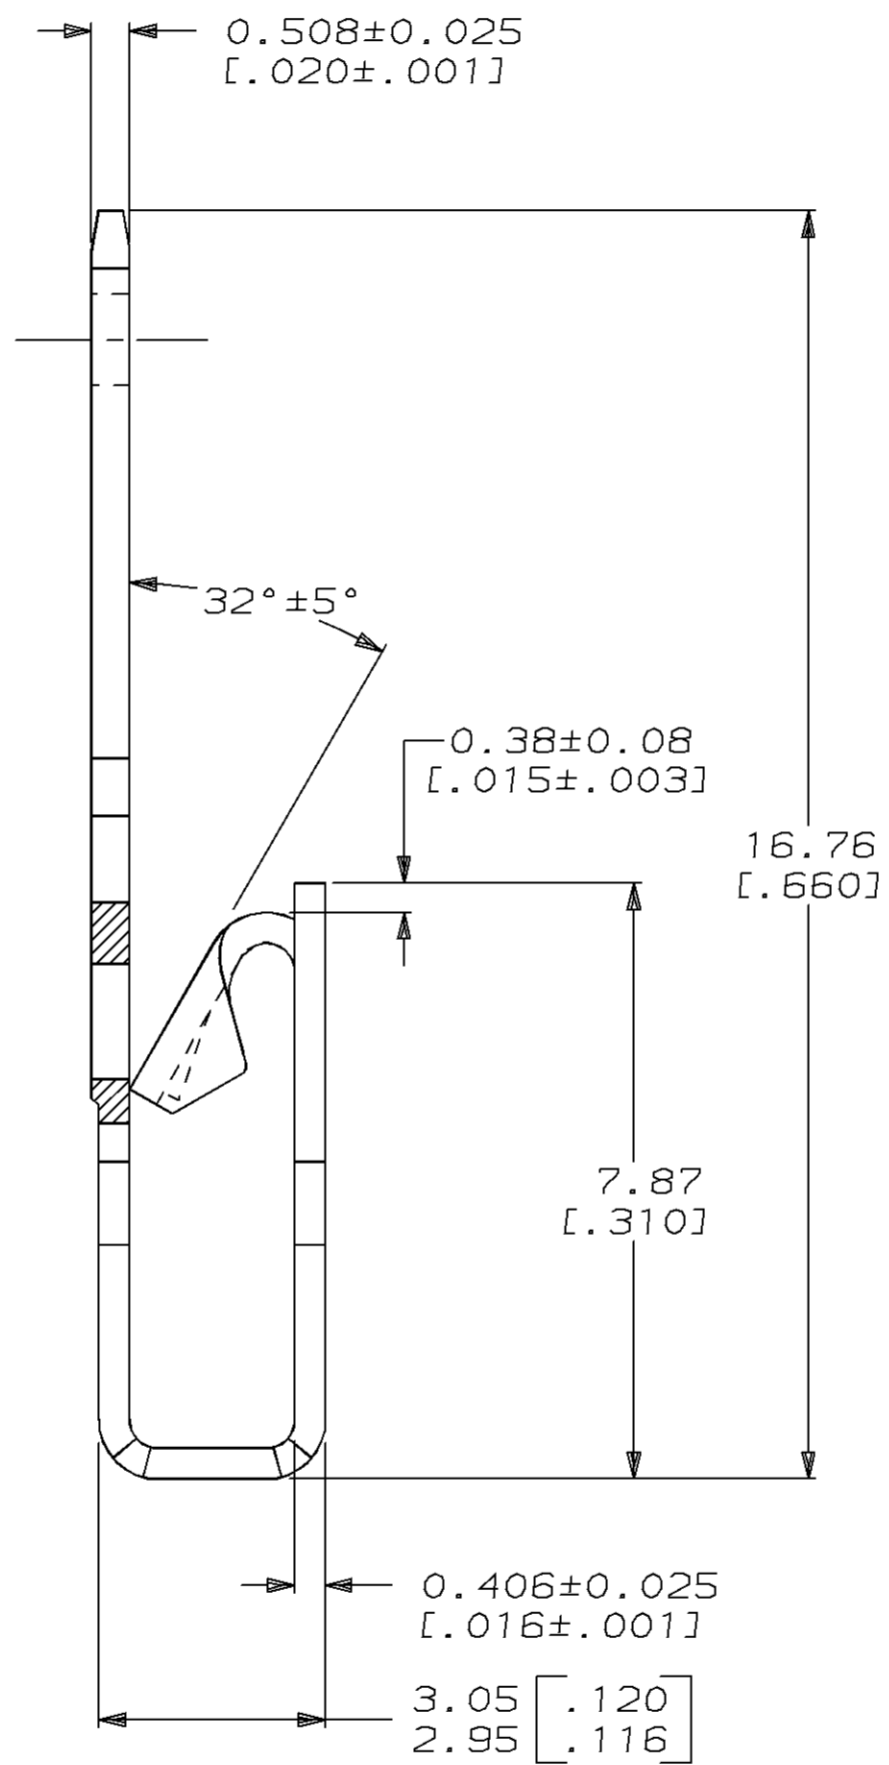

- ⑤ VARNISH RESIST OVER 0.002032 [.000080] MIN TIN PER MIL-T-10727.
- ⑥ 0.002032 [.000080] MIN TIN PER MIL-T-10727.

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- ② SLOT ACCEPTS 0.45-0.64mm [#25-#22] AWG COPPER MAGNET WIRE. 2 WIRES OF THE SAME SIZE PER SLOT EXCEPT 0.64mm [#22] AWG WHICH IS ONE WIRE ONLY.
- ③ POKE-IN ACCEPTS A 0.5-0.8mm² [#20-#18] AWG SOLID OR FUSED STRANDED LEAD WIRE.
- 4 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

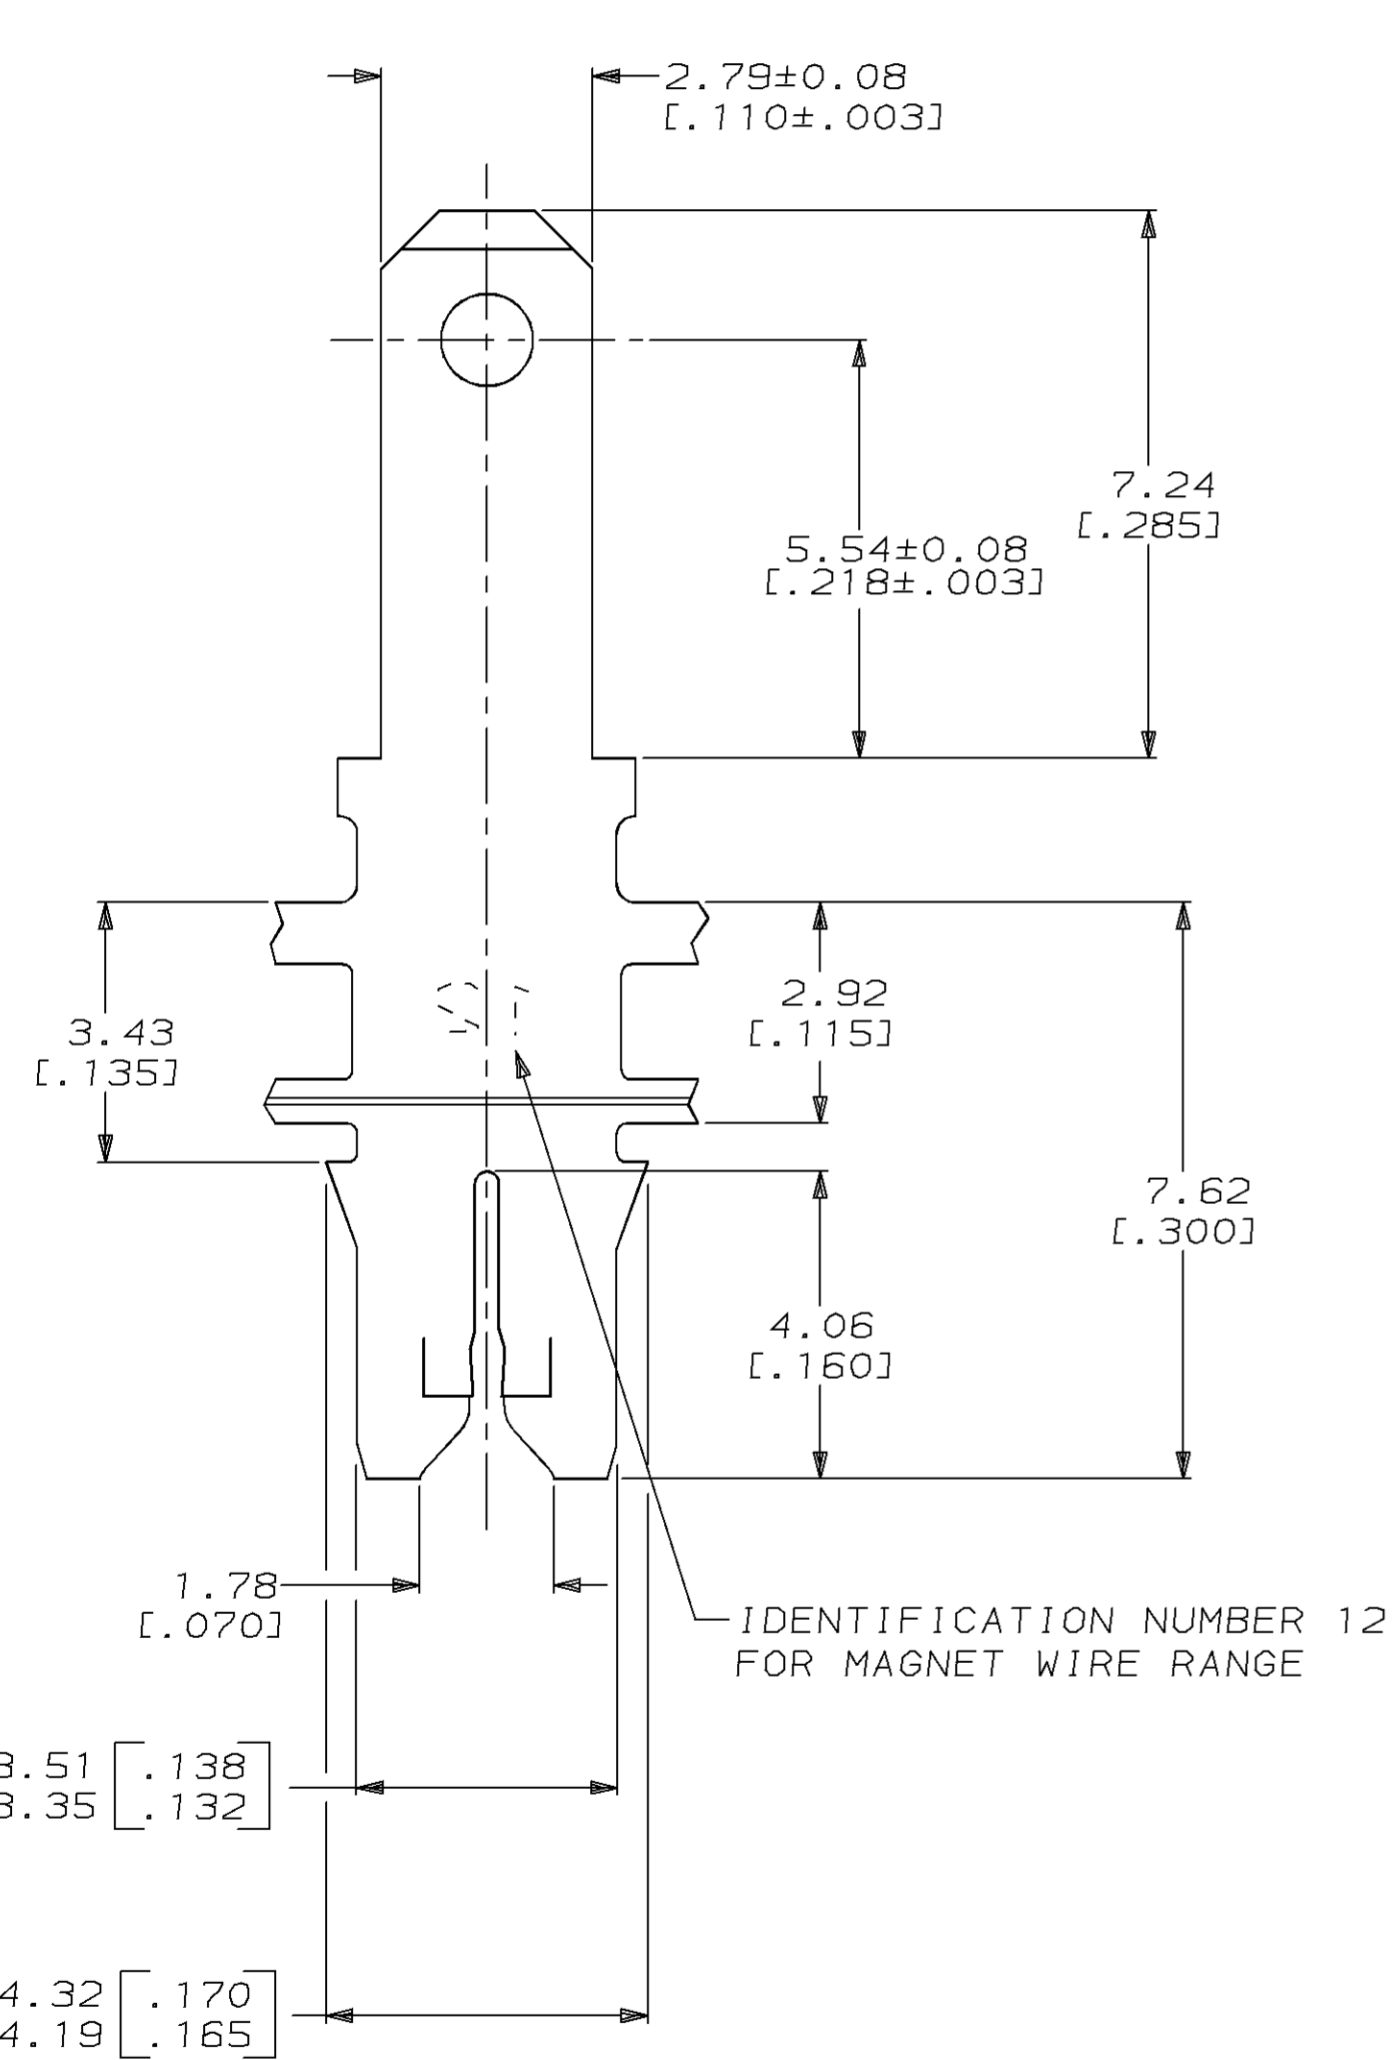

⑥	63063-2
⑤	63063-1
FINISH	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± -	DR 17/DEC/94 MICHAEL S. FEHER	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 19/DEC/94 JEFF R. RUTH	
MATERIAL 4M PRE-MILLED BRASS	APPD 20/DEC/94 NELSON E. NEFF	NAME TERMINAL, TAB, POKE-IN/2.79 [.110] FASTON™, COMBINATION, MAG-MATE™
FINISH SEE TABLE	APPD 20/DEC/94 TERRY L. SHUTTER	SIZE C 00779
	PRODUCT SPEC 108-2012	DRAWING NO C=63063
	APPLICATION SPEC 114-2046	SCALE 10:1
	WEIGHT -	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.