


- NOTES: (b)
- RoHS COMPLIANT
  - FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
  - METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
  - INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
  - CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
    - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
    - PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
    - PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
    - PLEASE ADD J for 50µm HARD GOLD over min. 50µm NICKEL
  - METAL BRACKETS: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
  - THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
  - FIXING-PLATE: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
  - CAPACITANCE: 1300pF ± 20%
  - DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
  - MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
  - CONNECTOR IS PART MARKED: 241□12370X CONEC ABC (see note 5)

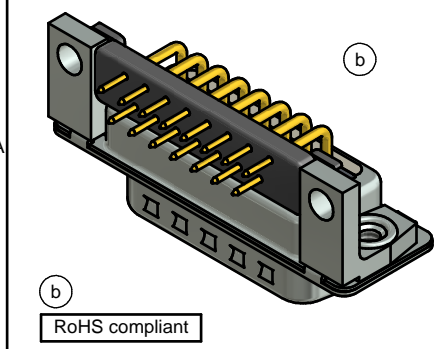

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)		
	date			material: SEE NOTES		
	name		title: D-SUB C-FILTER MALE 90°			
	drawn 17.07.2015 Heinrich		15pos. SOLDER PIN ANGLED 0.318inch with threaded insert, metal bracket, fixing-plate			
appd. 17.07.2015 Lehmenkühler		dwg no: 24K1A1611 (b)				
norm		DIN-A3				
d-old		sh: 1				
9 x b	A5725	17.07.15	M.H.	part no: 241□12370X (see note 5) (b)		
a	Original					
rev.	description	date	name			