


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!




SPECIFICATIONS

VOLTAGE & CURRENT: DC 24 V, 30 A
 WITHSTANDING VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 TEMPERATURE RANGE: -40 °C ~ +105 °C
 SCREW TORQUE VALUE: 10 Kgf.cm
 WIRE RANGE: 22 - 12 AWG
 1) MOLDED PARTS: Thermoplastic (UL 94 V-0)
 2) TERMINAL: BRASS, 1.3t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M4
 APPROVAL: () Pending

RoHS Compliant


PART NUMBER:

OSTYK11E04030

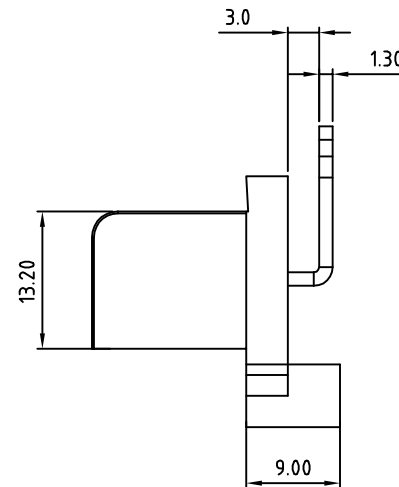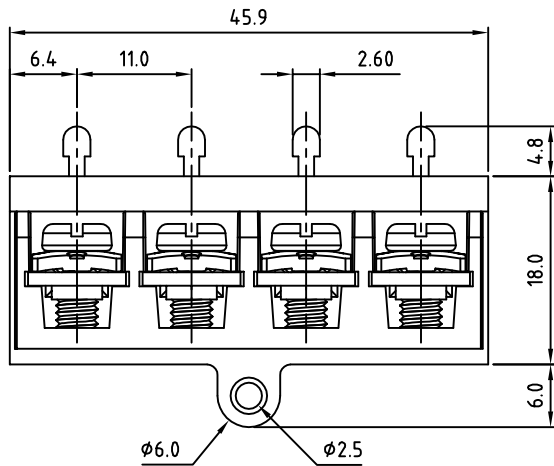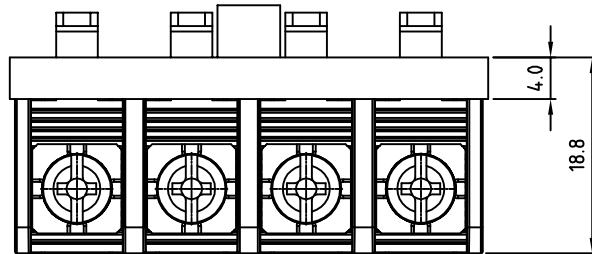

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTYK-11E-4P			DWG NO.		OSTYK11E04030.DWG	
PART NO.		OSTYK11E04030			APPROVED		Tolerance	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	UNIT: mm	X.	±0.50
Shi Jun 2007.07.18		Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18		SCALE: NONE	X.X	±0.30
SHEET: 01/01		REV.: D	X.XX	±0.10	X°	±1°		