

## Contact insert - HC-BBB 40-ESTC - 1409921

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON pin insert, BBB 40 series, 40-pos., crimp connection



### Key Commercial Data

Packing unit	1 pc
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### General

Connection method	Crimp connection
Degree of pollution	3
Overvoltage category	III
Number of positions	40+PE
Insertion/withdrawal cycles	≥ 500
Size	B16
Conductor cross section	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Connection cross section AWG	20 ... 12
Stripping length of the individual wire	7.5 mm
Assembly instructions	- Housing heights of h ≥ 72 mm are recommended when there is a high number of wires.
Connection	Connectors may be plugged in only when there is no load/voltage.

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

#### Material data

Flammability rating according to UL 94	V0
--	----

# Contact insert - HC-BBB 40-ESTC - 1409921

## Technical data

### Material data

Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC

### Electrical characteristics

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

### Standards and Regulations

Connection in acc. with standard	UL
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440205
eCl@ss 9.0	27440205

### ETIM

ETIM 3.0	EC000796
ETIM 4.0	EC000437
ETIM 5.0	EC000438

### UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

## Approvals

### Approvals

# Contact insert - HC-BBB 40-ESTC - 1409921

## Approvals


Approvals


UL Recognized / cUL Recognized / EAC / GL / cULus Recognized

Ex Approvals

Approvals submitted


## Approval details

UL Recognized 	
mm <sup>2</sup> /AWG/kcmil	12
Nominal voltage UN	500 V

cUL Recognized 	
mm <sup>2</sup> /AWG/kcmil	12
Nominal voltage UN	500 V

EAC


GL

cULus Recognized 	
--	--


## Drawings

# Contact insert - HC-BBB 40-ESTC - 1409921

Schematic diagram




Dimensional drawing

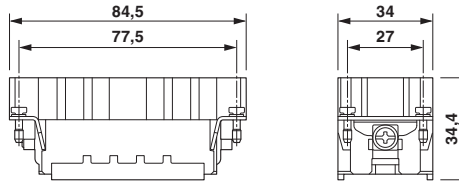

Dimensional drawing


Connector pin assignment, connection side

Dimensional drawing

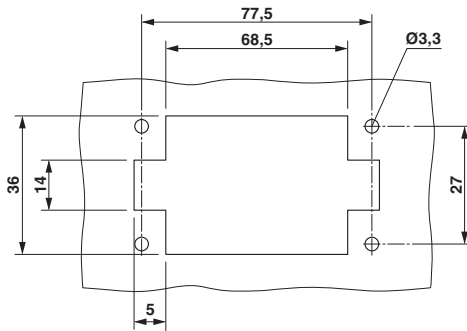

Panel cutout

Diagram

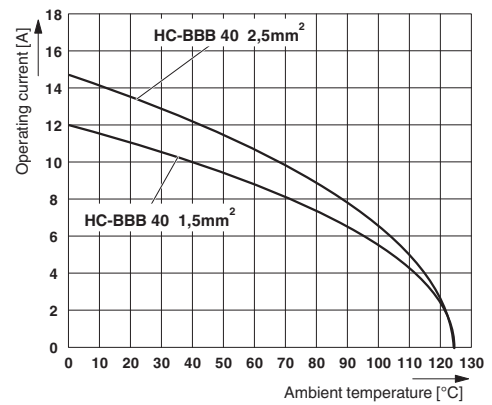

Derating diagram