



REV.	DATE	DESCRIPTION
A	01/12/02	REMOVE CONTACT PIN

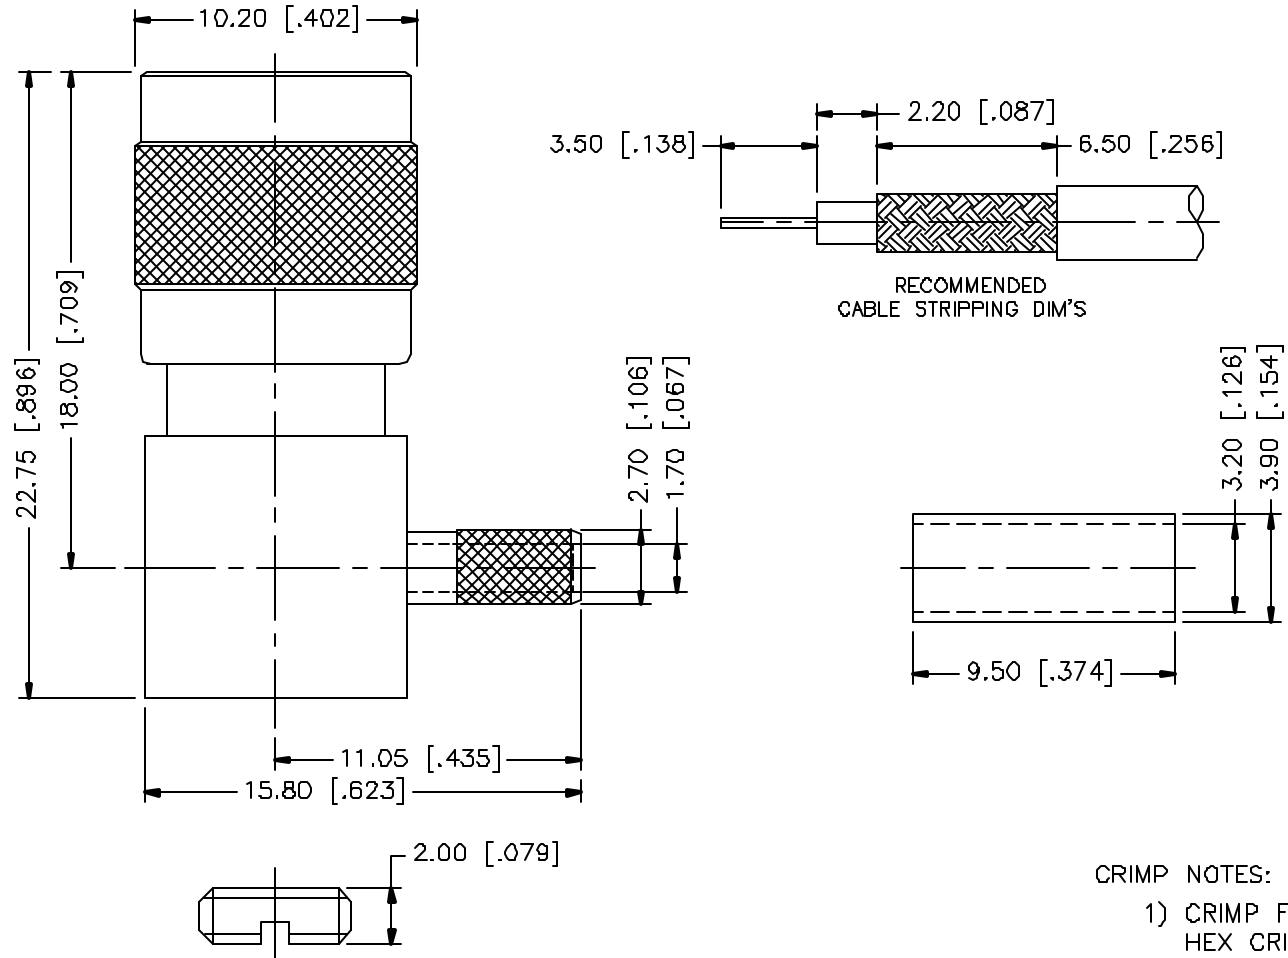

RECOMMENDED
CABLE STRIPPING DIM'S

CRIMP NOTES:

- 1) CRIMP FERRULE
HEX CRIMP SIZE .128"

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	GOLD	DRAWN	G.R.S.					01/12/02	
2	INSULATOR	TEFLON	NATURAL	CHECKED							
3	CONTACT PIN	BEP COPPER	GOLD	ISSUED							
4	FERRULE	COPPER	GOLD								
5											
6											
7											
8											
			UNLESS OTHERWISE SPECIFIED DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY								
			UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4								
			DO NOT SCALE DRAWING								
						TITLE		SMB R/A SNAP LOCK CRIMP PLUG (FOR RG-179/U, 187A/U CABLE - 75ohms)			
						SIZE	FSCM NO.	DWG. NO.	REV.		
						A	99001	142286.DWG	A		
						SCALE	PART NO.	SHEET		1 OF 1	
						NA	142286				