
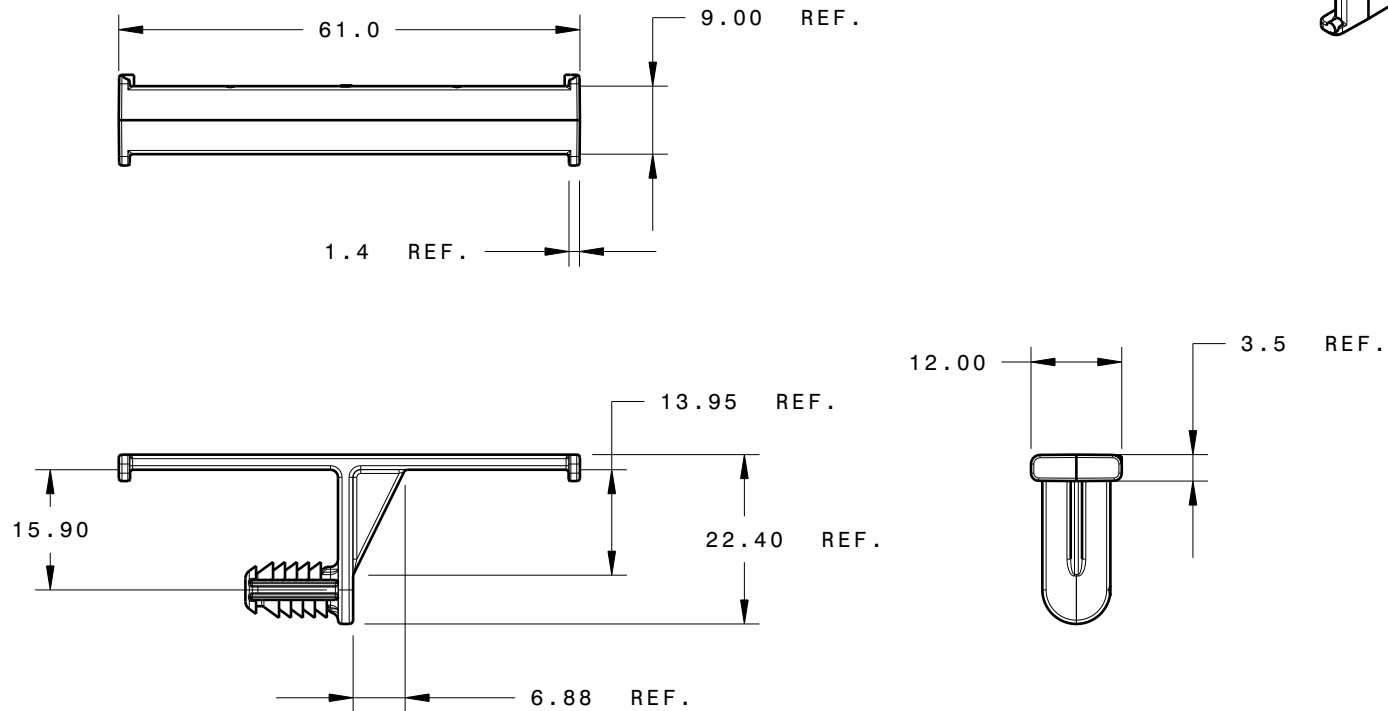


REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN A 6.5mm HOLE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 30 LBS MIN IN A 6.5mm HOLE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.70mm - 5.75mm
4. CIRCULAR HOLE SIZE DIAMETER: 6.5 +/- 0.30mm

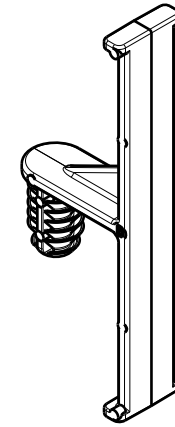

INVENTORS

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON

name	date	city, state
S. ADAMS	3/26/07	MENOMONEE FALLS, WI.

REVISIONS	D level	04
	W by	SJA
	N date	10/27/08
	G ECN #	011158
	part level	B

DIMENSIONS	TOLERANCES	.XXXX = ± 0.25
		.XXX = ± 0.50
		.XX = ± 1.00
		.X = ± 2.00
		∠ = ± 0.50
	unless otherwise specified	
units	millimeters	

PART	number	SOC8FT6	phase	PRODUCTION
	name			
	STAND-OFF TAPE CLIP			
	material	NYLON 6/6 IMPACT MODIFIED, HEAT STABILIZED COLOR: NATURAL		

DRAWING	FORMAT	AH	CATIA V5	SCALE	1:1	
	VERSION	J	CAD	previous drawing number		
	A- SIZE (landscape)_N01		previous drawing number			
	drawn	S. ADAMS	checked	J. PASSILLA	approved	
		12/07/07		12/07/07		
	type	CUSTOMER		sheet 1 of 1		
number	MT07-051-001CST					