

Hybrid motor starter - ELR H3-IES-PT-24DC/500AC-06-T - 2906061

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Hybrid motor starter for starting 3~ AC motors up to 550 V AC, with 24 V DC input, 0.6 A output current, emergency stop function, adjustable overload shutdown, higher transient voltage strength, and push-in connection.

The figure shows the ELR H3-IES-PT- 24DC/500AC-0,6 version

Product Features



Key commercial data

| | |
|----------------------|----------|
| Packing unit | 1 pc |
| Custom tariff number | 85371099 |
| Country of origin | Germany |

Technical data

Input data

| | |
|---------------------------------------|--------------------------------------|
| Input name | Device supply |
| Rated control supply voltage U_s | 24 V DC (According to IEC 60947-1) |
| Voltage range with reference to U_s | 0.8 ... 1.25 |
| Rated control supply current I_s | ≤ 40 mA |
| Protective circuit | Protection against polarity reversal |
| | Surge protection |
| Operating voltage display | Green LED |
| Status display | Yellow LED |
| Indication | Red LED |
| Input name | Control input |
| Rated actuating voltage U_c | 24 V DC |
| Voltage range with reference to U_c | 0.8 ... 1.25 |
| Rated actuating current I_c | ≤ 5 mA |

Hybrid motor starter - ELR H3-IES-PT-24DC/500AC-06-T - 2906061

Technical data

Input data

| | |
|----------------------------|--------------------------------------|
| Switching level "safe off" | < 5 V DC |
| Protective circuit | Protection against polarity reversal |
| Typical response time | < 35 ms |
| Typical turn-off time | < 40 ms |

Output data load output

| | |
|---|----------------------------------|
| Rated operating voltage U_e | 500 V AC |
| Operating voltage range | 42 V AC ... 550 V AC |
| Load current | max. 600 mA (see derating curve) |
| Min. load current | 75 mA |
| Trigger characteristic in acc. with IEC 60947 | Class 10A |
| Rated operating current at AC-51 | 0.6 A |
| Rated operating current at AC-53a | 0.6 A |
| Leakage current | 0 mA |
| Residual voltage | < 0.2 V (at I_e) |
| Protective circuit | Surge protection Varistor |

Output data reply output

| | |
|---------------------------------------|--|
| Note | Confirmation 01: floating change-over contact, signal contact |
| Contact type | 1 PDT |
| Contact material | AgSnO ₂ , hard gold-plated |
| Maximum switching voltage | 30 V AC |
| | 36 V DC |
| Minimum switching voltage | 100 mV AC/DC (at 10 mA) |
| Min. switching current | 1 mA (at 24 V) |
| Maximum inrush current | 50 mA |
| Limiting continuous current | 50 mA |
| Interrupting rating (ohmic load) max. | 1.2 W (at 24 V DC) |
| Note | the following values are applicable if a gold layer is destroyed |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 5 V (at 100 mA) |
| Min. switching current | 10 mA (at 12 V) |
| Limiting continuous current | 6 A |
| Interrupting rating (ohmic load) max. | 140 W (at 24 V DC) |
| | 20 W (at 48 V DC) |
| | 18 W (at 60 V DC) |
| | 23 W (at 110 V DC) |
| | 40 W (at 220 V DC) |

Hybrid motor starter - ELR H3-IES-PT-24DC/500AC-06-T - 2906061

Technical data

Output data reply output

| | |
|---|------------------------|
| | 1500 VA (for 250 V AC) |
| Switching capacity according to IEC 60947-5-1 | 2 A (at 24 V, DC13) |
| | 0.2 A (at 110 V, DC13) |
| | 0.1 A (at 220 V, DC13) |
| | 3 A (at 24 V, AC15) |
| | 3 A (at 120 V, AC15) |
| | 3 A (at 230 V, AC15) |

Measuring technology and signaling contact

| | |
|---------------|---|
| Measuring via | Current transformer for line current on L1 and L3 |
|---------------|---|

Connection data

| | |
|---------------------------------------|---------------------|
| Connection method | Push-in connection |
| Stripping length | 10 mm |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |

General

| | |
|--------------------------|--|
| Mounting position | Vertical (horizontal DIN rail) |
| Assembly instructions | Can be aligned with spacing = 20 mm |
| Operating mode | 100% operating factor |
| Designation | Standards/regulations |
| Standards/regulations | IEC 60947-1 |
| | EN 60947-4-2 |
| | IEC 61508 |
| | ISO 13849 |
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178 |
| Rated surge voltage | 6 kV |
| Insulation | Safe isolation (EN 50178) for mains voltage ≤ 500 V AC |
| | Safe isolation (IEC 60947-1) for mains voltage ≤ 300 V AC |
| | Basic insulation (IEC 60947-1) for mains voltage of 300 ... 500 V AC |
| Rated insulation voltage | 500 V |
| Pollution degree | 2 |
| Surge voltage category | III |

Hybrid motor starter - ELR H3-IES-PT-24DC/500AC-06-T - 2906061

Technical data

General

| | |
|---|--------------------------|
| Safety Integrity Level according to IEC 61508 | SIL 3 (safe shutdown) |
| | SIL 2 (motor protection) |
| Category acc. to EN ISO 13849 | 3 |
| Performance level according to ISO 13849 | e |

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | 5 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Degree of protection | IP20 |

UL data

| | |
|-------------------------------------|--|
| Short-circuit current rating (SCCR) | 100 kA (500 V AC (30 A CC/30 A J (high fault) fuse)) |
| | 5 kA (500 V AC (20 A RK5 (standard fault) fuse)) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27371601 |
| eCl@ss 6.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC001037 |
|----------|----------|

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

ATEX

Hybrid motor starter - ELR H3-IES-PT-24DC/500AC-06-T - 2906061

Approvals


Approvals submitted

Approval details



Drawings

Diagram

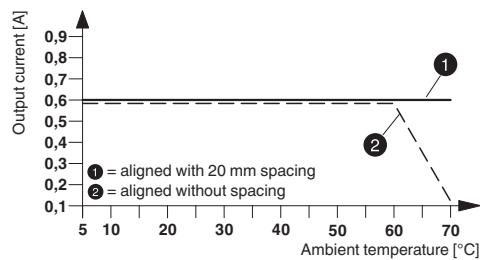

Derating curve