
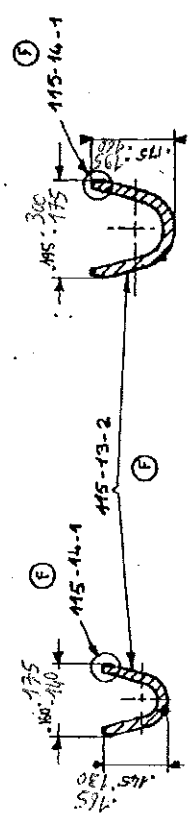
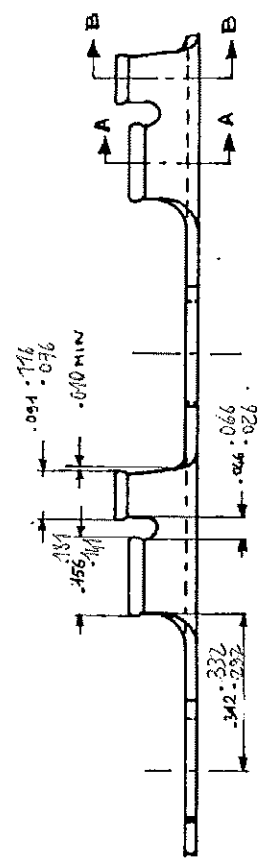


CODE	GAGE NO

DIMENSIONS I & II TO BE
EQUAL WITHIN .020

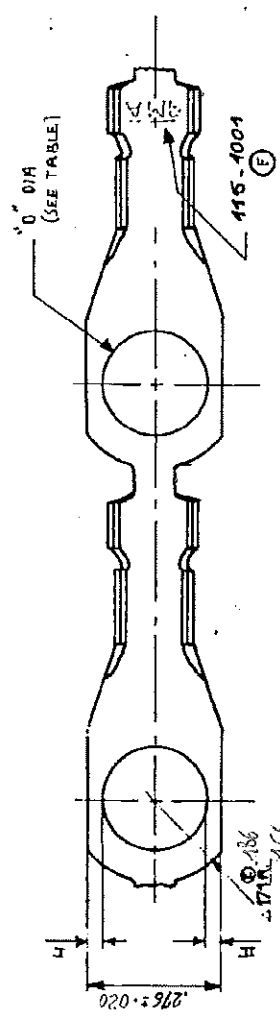

SEC. A-A

SEC. B-B

140663-664

DIFFUSION N°

4	RAIN	140663-1A
4 mm	Tin Plated	140664
4 mm	1-	140663
D ₃ 0.014		PART NUMBER
STOCK THK .0136 X 3%		TOLERANCES
WIRE RANGE		.000 ± 1.008
WIDE		18-14
TRIMMING BURR NOT TO EXCEED .005 IN.		FINISH
SPECIFICATION CLASSIFICATION		INSULATION RANGE
CRITICAL MINOR		.10 0in
MAJOR REF(NONE) SDF 1B-11		SCALE
DR C. GUYADER		4:1
REL G. MINICU		LOC
APPL P.E. GRASSAND		F B
REL		NUMBER
DW - 330		140663-664
WOW .312		REV
INS CRIMP		A
INS CRIMP		
SURFACE AREA 3.523 SQ IN.		
LAYOUT NO. 3529		
DIE QTY/REEL 5000		
HEAT TREAT		
DIRECTION OFF TOP OF REEL		
407.3 Fig. 6		
APPL FEED 855		
DIE FEED 855		

RECTANGULAR TONGUE

BRASS 1/2 HARD

140663-1A
140664
140663

18-14

115-14-1
115-13-2
115-14-4

115-1001