


FCI P/N	L/mm
10129479-P0006YYLF	60

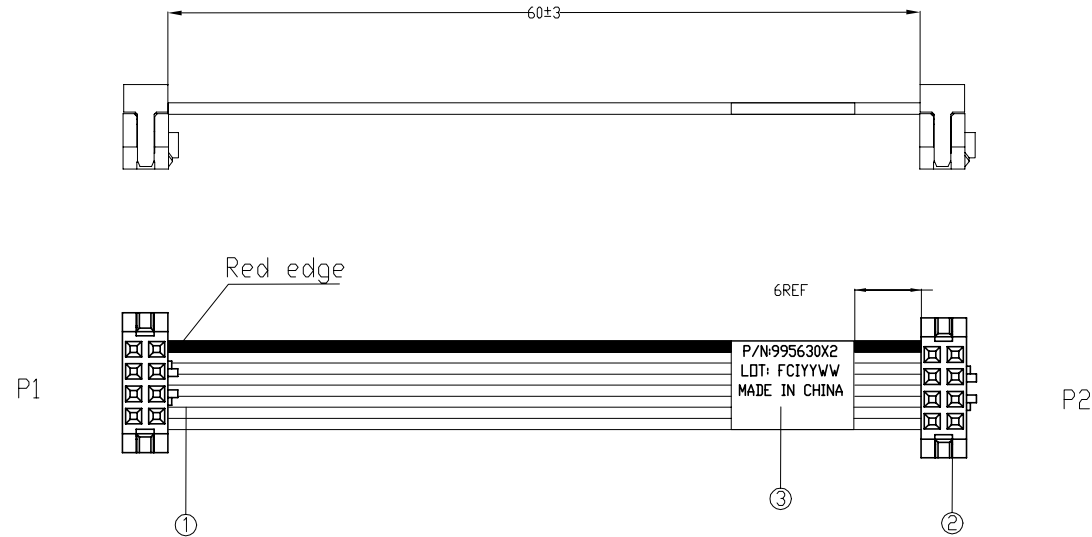

NOTES:

1. TEST:

□/S:100% TEST.  
 CONNECTION RESISTANCE: 3 OHM MAX.  
 HI-POT:300V/10mS.  
 INSULATION RESISTANCE: 10 MOHM MIN.

2. ROHS COMPLIANCE

3. LABEL DETAIL

P/N: 995630X2  
 LOT: FFYYWW  
 MADE IN XXXX

Where: XXXX  
 FF=Factory symbol  
 YY=year  
 WW=week

XXXX=Country of origin

Font type: Arial or Univers 57 Condensed  
 Font size: Human readable (minimum height 1,5 mm)

③	LABEL	LABEL . W=25MM	1	EA
②	IDC CONN.	Minitex 2x4 position IDC receptacle, 0.76um gold, with central key and friction latch bump,	2	EA
①	RIBBON CABLE	UL2651, 28AWGx8C, Pitch1.0, Grey PVC	A/R	M
No.	NAME	DESCRIPTION	QTY	UNIT

dr	Harry Shi	2014-05-29	projection	MM	size	A3	scale	N/A
eng	Harry Shi	2014-05-29			ecn no		rel level	
chr	Guo-Feng Jin	2014-05-29			rel level			
appr	Guo-Feng Jin	2014-05-29			product family	Quickie IDC		

spec ref	See Notes		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		
surface	linear	0.X	±
		0.XX	± 0.20
		0.XXX	±
	angular	0°	±°

rev	ecn no	dr	date
A		Harry	2014-05-29

	title QUICKIE IDC CABLE ASSEMBLY	dwg no 10129479-P0006YYLF	rev A



Copyright FCI.