


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

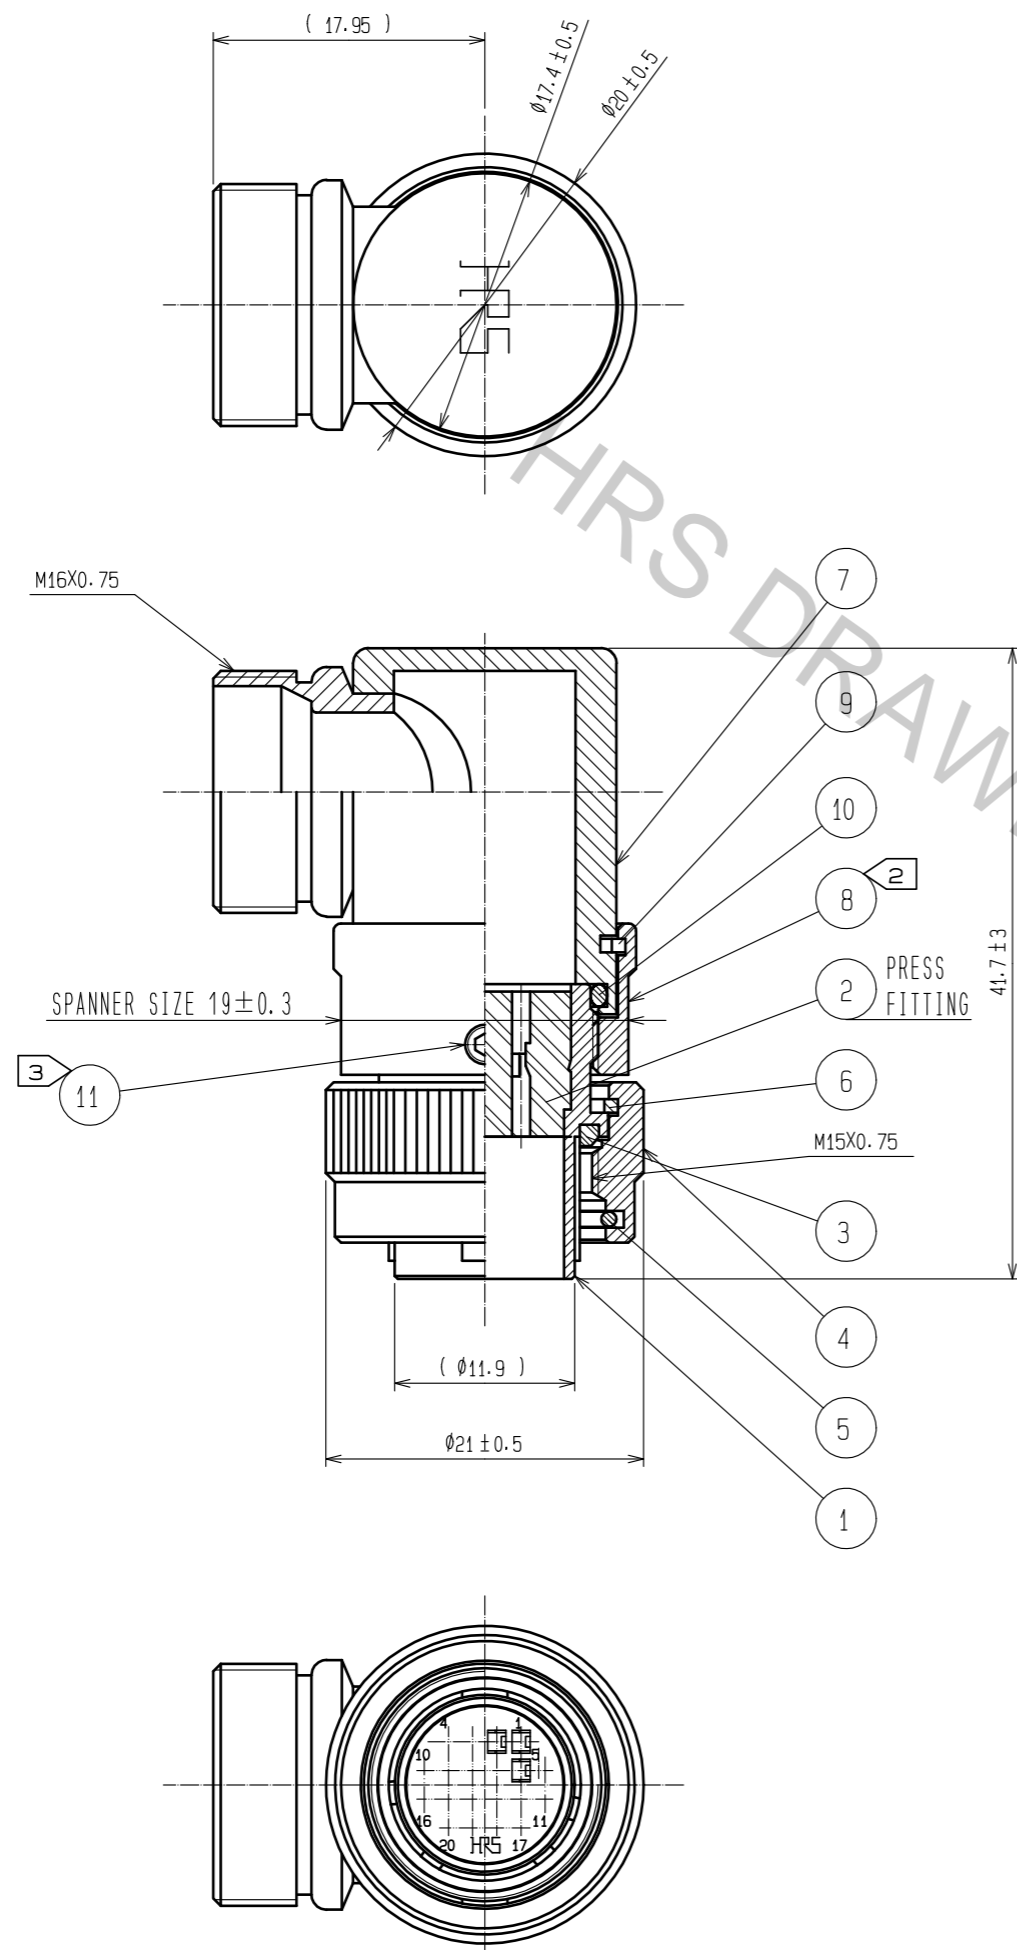

- NOTES
- ONE EXAMPLE OF THE ROTATION OF REF.NO.7,8 AND REF.NO.1 IS SHOWN.
 - THE RECOMMENDED CLAMP TORQUE REF.NO.8 : 3 TO 4 N · m.
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.8 FROM LOOSENING.
 - THE RECOMMENDED CLAMP TORQUE REF.NO.11 : 0.2 TO 0.3 N · m.
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.11 FROM LOOSENING.
 - THIS PRODUCT TO BE USED WITH CABLECLAMP, JR13WCC-*(72). THE RECOMMENDED CLAMP TORQUE : 3 TO 4 N · m. AND LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT FROM LOOSENING. * DESIGNATE DIAMETER OF APPLICABLE CABLE.
 - THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
6	PHOSPHOR BRONZE	NICKEL PLATING		11	STAINLESS STEEL		JISB1177 HEAGON SOCKET SET SCREW M2.6X0.45
5	STEEL	NICKEL PLATING		10	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
4	BRASS	NICKEL PLATING		9	PHOSPHOR BRONZE	NICKEL PLATING	
3	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)		8	BRASS	NICKEL PLATING	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0		7	BRASS	NICKEL PLATING	
1	ZINC ALLOY	NICKEL PLATING					

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.22	DRAWING NO. EDC-116688-31-00		
CHECKED : HY. KOBAYASHI			18.02.22	PART NO. HR22-12WTL P-20PC(31)		
DESIGNED : HY. KISHI			18.02.21	CODE NO. CL122-0064-9-31		
DRAWN : MK. INOUE			18.02.06	△ 1/1		