


Number of contacts

96, 64, 32

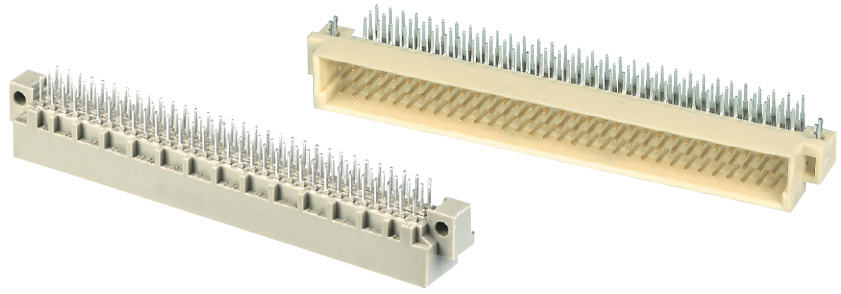

Male connectors

DIN Signal up to 2 A

Identification	No. of contacts	Contact arrangement	Performance levels according to IEC 60603-2. Explanation chapter 00			
			Part number 3	2	1	
Male connector with angled solder pins Length 3 mm	96		09 03 196 7921	09 03 196 6921	09 03 196 2921	
			09 03 396 7921 <sup>b)</sup>	09 03 196 6921 222 <sup>f)</sup>	09 03 196 2921 222 <sup>f)</sup>	
				09 03 396 6921 <sup>b)</sup>	09 03 396 2921 <sup>b)</sup>	
	THR	96			09 03 696 6921 <sup>c)</sup>	09 03 696 2921 <sup>c)</sup>
					09 03 696 6921 222 <sup>c)f)</sup>	09 03 696 2921 222 <sup>c)f)</sup>
	THR	96			09 03 896 6921 <sup>b)c)</sup>	
				09 03 164 7921	09 03 196 6919 <sup>d)</sup>	09 03 196 2919 <sup>d)</sup>
				09 03 364 7921 <sup>b)</sup>	09 03 396 6919 <sup>b)d)</sup>	09 03 396 2919 <sup>b)d)</sup>
	THR	64			09 03 696 6919 <sup>c)d)</sup>	
				09 03 164 6921	09 03 164 6921	09 03 164 2921
09 03 364 6921 <sup>b)</sup>				09 03 164 6921 222 <sup>f)</sup>	09 03 164 2921 222 <sup>f)</sup>	
THR	64			09 03 364 6921 <sup>b)</sup>	09 03 364 2921 <sup>b)</sup>	
				09 03 664 6921 <sup>c)</sup>	09 03 664 2921 <sup>c)</sup>	
Male connector with straight solder pins	32		09 03 132 7921	09 03 132 6921	09 03 132 2921	
			09 03 332 7921 <sup>b)</sup>	09 03 332 6921 <sup>b)</sup>	09 03 332 2921 <sup>b)</sup>	
	THR	94 + 2 <sup>▲</sup>			09 03 632 6921 <sup>c)</sup>	
				09 03 196 7951	09 03 196 6951	09 03 196 2951
					09 03 396 6951 <sup>b)</sup>	
	THR	94 + 2 <sup>▲</sup>			09 03 696 6951 <sup>c)</sup>	
					09 03 396 6918 <sup>b)d)</sup>	
	THR	62 + 2 <sup>▲</sup>				
				09 03 164 7951	09 03 164 6951	09 03 164 2951
				09 03 364 7951 <sup>b)</sup>	09 03 364 6951 <sup>b)</sup>	09 03 364 2951 <sup>b)</sup>
THR	62 + 2 <sup>▲</sup>			09 03 664 6951 <sup>c)</sup>		
				09 03 164 6918 <sup>d)</sup>		
THR	96			09 03 164 6918 <sup>d)</sup>		
				09 03 196 6569		
				09 03 396 6569 <sup>b)</sup>		
THR	96		09 03 196 7922	09 03 196 6922	09 03 196 2922	
				09 03 196 6920 <sup>d)</sup>		
			09 03 164 7922	09 03 164 6922	09 03 164 2922	

<sup>▲</sup> Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]. Lagging pins on request.

<sup>b)</sup> Connectors with snap-in clips see chapter 00

<sup>c)</sup> Connectors with coding see chapter 00

<sup>d)</sup> CTI > 400

<sup>f)</sup> Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2