

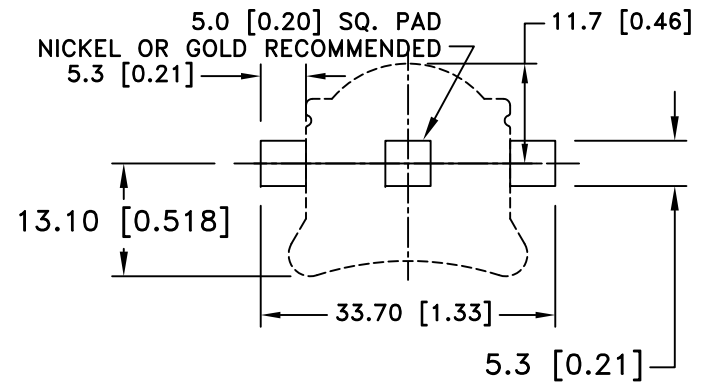


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/01/15	A	UPDATED SPECIFICATION	T.B.	B.S.	
02/26/16	B	ADDED DIM. 8.80, 13.10, 20.50 REMOVED DIM. 19.30	T.B.	B.S.	

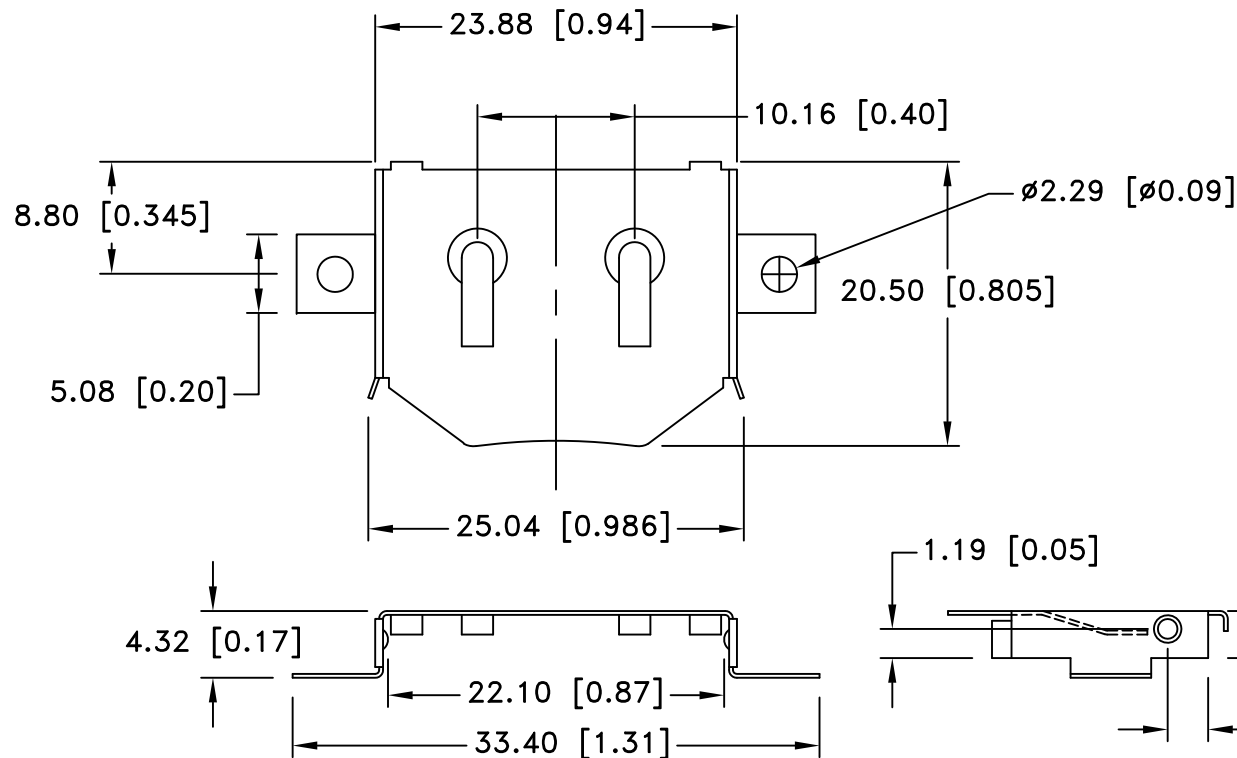


PCB LAYOUT

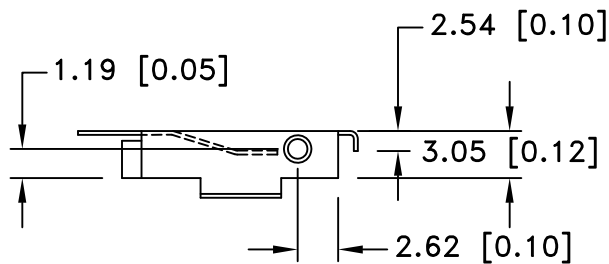

SPECIFICATION

- * Contact : Phosphor Bronze C5191, Nickel Plated 80-150u thickness
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
6 milli-seconds 3 shock pulses each direction per axis,
total of 18 pulses
- * Result: no evidence of physical damage
- * ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)	Scale	Drawn By B.S.	
Fractional $\pm .8$ (.030)	Title CR2032 SURFACE MOUNT BATTERY RETAINER		
Angular $\pm 3^\circ$	Date 02/26/16	Drawing Number BRX1-2032-SM	
		Approved By T.B.	