

| PART NO. | HRS NO. | CONTACTS | A | B | C | D | E | F |
|---------------------|-----------------|----------|-------|-------|-------|-------|-------|-------|
| DF 14- 2P-1.25H(25) | CL538-0021-4-25 | 2 | 7.45 | 1.25 | 2.95 | 3.65 | 6.45 | 8.05 |
| DF 14- 3P-1.25H(25) | CL538-0022-7-25 | 3 | 8.70 | 2.50 | 4.20 | 4.90 | 7.70 | 9.30 |
| DF 14- 4P-1.25H(25) | CL538-0023-0-25 | 4 | 9.95 | 3.75 | 5.45 | 6.15 | 8.95 | 10.55 |
| DF 14- 5P-1.25H(25) | CL538-0024-2-25 | 5 | 11.20 | 5.00 | 6.70 | 7.40 | 10.20 | 11.80 |
| DF 14- 6P-1.25H(25) | CL538-0025-5-25 | 6 | 12.45 | 6.25 | 7.95 | 8.65 | 11.45 | 13.05 |
| DF 14- 7P-1.25H(25) | CL538-0026-8-25 | 7 | 13.70 | 7.50 | 9.20 | 9.90 | 12.70 | 14.30 |
| DF 14- 8P-1.25H(25) | CL538-0027-0-25 | 8 | 14.95 | 8.75 | 10.45 | 11.15 | 13.95 | 15.55 |
| DF 14- 9P-1.25H(25) | CL538-0028-3-25 | 9 | 16.20 | 10.00 | 11.70 | 12.40 | 15.20 | 16.80 |
| DF 14-10P-1.25H(25) | CL538-0029-6-25 | 10 | 17.45 | 11.25 | 12.95 | 13.65 | 16.45 | 18.05 |
| DF 14-15P-1.25H(25) | CL538-0084-4-25 | 15 | 23.70 | 17.50 | 19.20 | 19.90 | 22.70 | 24.30 |
| DF 14-20P-1.25H(25) | CL538-0089-8-25 | 20 | 29.95 | 23.75 | 25.45 | 26.15 | 28.95 | 30.55 |
| DF 14-25P-1.25H(25) | CL538-0094-8-25 | 25 | 36.20 | 30.00 | 31.70 | 32.40 | 35.20 | 36.80 |
| DF 14-30P-1.25H(25) | CL538-0020-1-25 | 30 | 42.45 | 36.25 | 37.95 | 38.65 | 41.45 | 43.05 |


RECOMMENDED PATTERN

NOTE 1. LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1 MAX.
 2 WHEN THIS CONNECTOR MATES WITH DF14-*S-1.25C, THE MATING LENGTH IS 7.3mm.
 3 FOR CONNECTORS, 2 OR 3 CONTACTS, SIMPLIFIED LOCK HOLE SHALL BE SET AT THE CENTER OF HOUSING.

| NO. | MATERIAL | FINISH | REMARKS | NO. | MATERIAL | FINISH | REMARKS |
|-----|-----------------|---------------------------|---------------------------------------|-----|---------------------|--------|--------------------------|
| 3 | PHOSPHOR BRONZE | TIN-COPPER PLATED 1#m min | UNDER PLATING:NICKEL PLATED 0.5#m min | 5 | S. PVC | | |
| 2 | BRASS | TIN-COPPER PLATED 1#m min | UNDER PLATING:NICKEL PLATED 0.5#m min | 4 | RIGID VINYLCHLORIDE | | ELECTROSTATIC PROTECTION |
| 1 | POLYAMIDE | BEIGE, UL94V-0 | | | | | |

| UNITS | SCALE | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|-------|-------|-------|--------------------------|--------------|---------------|----------|
| mm | 5 : 1 | 2 | DIS-H-008680 | MI. SAKIMURA | TS. FUKUSHIMA | 14.04.11 |

| APPROVED | CHECKED | DESIGNED | DRAWN | DRAWING NO. | PART NO. | CODE NO. |
|---------------|----------|---------------|---------------|----------------|-------------------|----------|
| :KJ. KATAYOSE | :TY. OMA | :TS. KUMAZAWA | :TS. KUMAZAWA | EDC3-160307-18 | DF14-*P-1.25H(25) | CL538- |

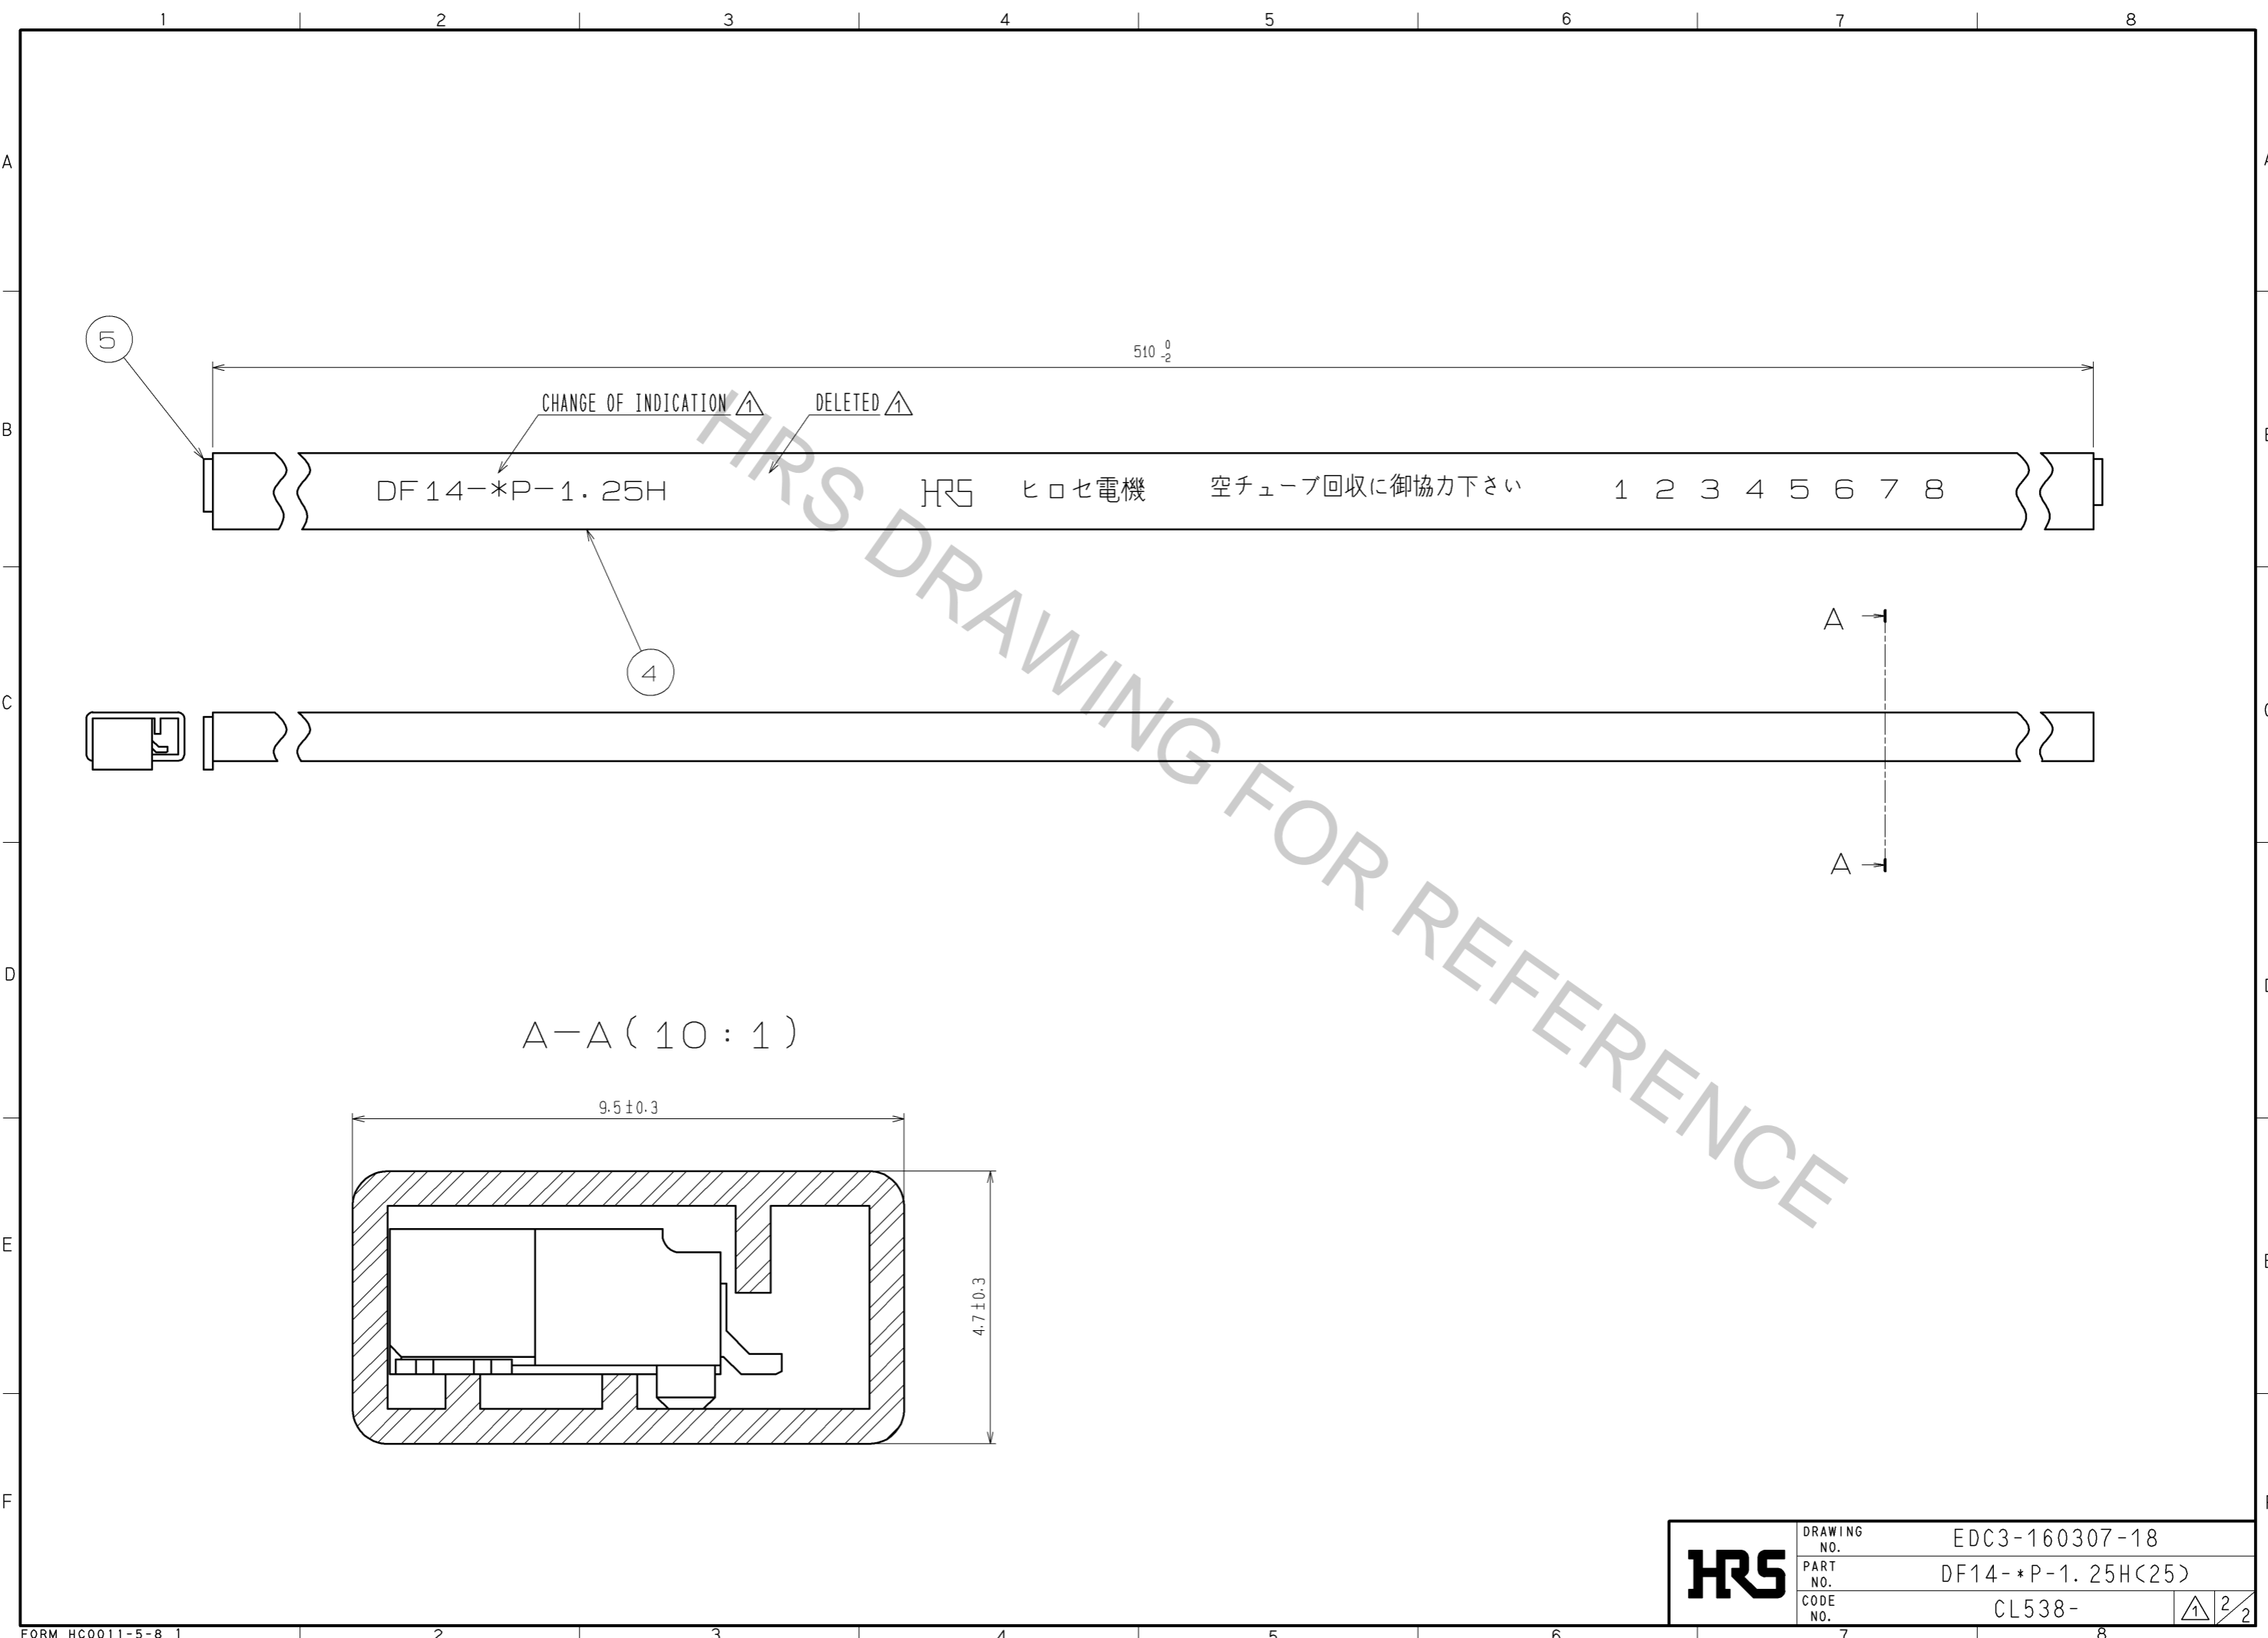

| | | |
|------------|-------------|-------------------|
| HRS | DRAWING NO. | EDC3-160307-18 |
| | PART NO. | DF14-*P-1.25H(25) |
| | CODE NO. | CL538- |
| | | \triangle 2/2 |