


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|---------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| H | - | | | | |
| C | | ECR-13-004288 | 15MAR2013 | RC | AH |

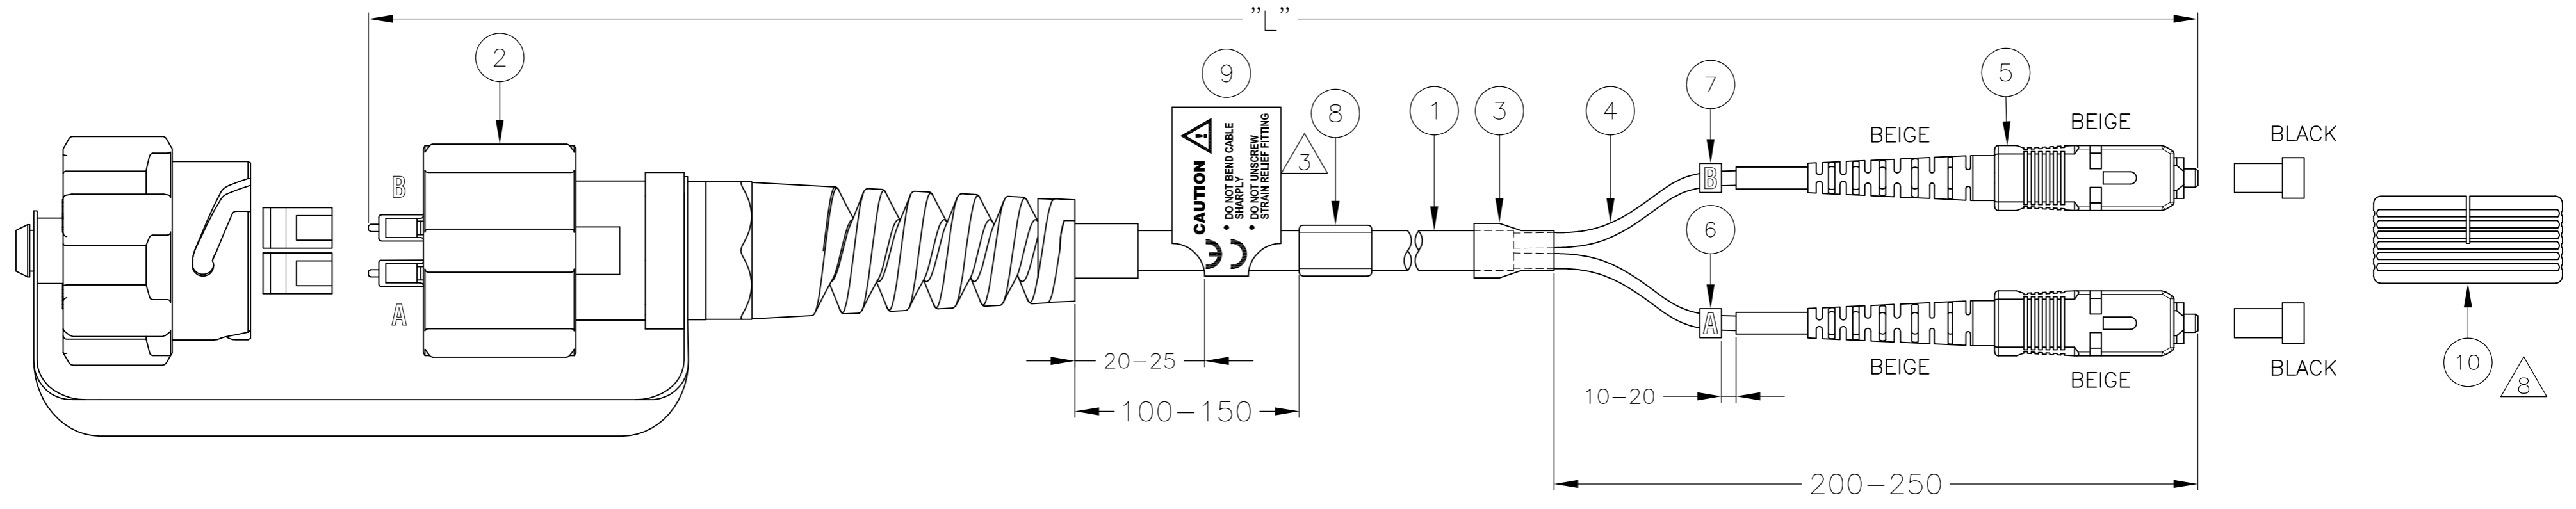

| FIBER CONNECTIVITY | |
|--------------------|----------|
| ODVA | SC CONN. |
| A | A |
| B | B |

| PART NUMBER | "L" (METER) | | MAXIMUM Δ_1 ATTENUATION (dB) |
|-------------|-------------|--------|-------------------------------------|
| | MIN | MAX | |
| 1-1920985-0 | 9.85 | 10.15 | - |
| 2-1920985-0 | 19.80 | 20.20 | 0.55 |
| 5-1920985-0 | 45.50 | 50.50 | 0.6 |
| 8-1920985-0 | 79.20 | 80.80 | 0.64 |
| 8-1920985-1 | 118.8 | 121.2 | 0.7 |
| 8-1920985-2 | 297.0 | 303.0 | 1.0 |
| 9-1920985-9 | 99.00 | 101.00 | 0.65 |

- NOTES:**
- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5 dB/km AT 1300 nm, 155 mbps (SEE TABLE)
 - 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
 - 3 INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
 - 4 CABLE INFORMATION:
 - FIBER CORE DIAMETER: 62.5/125 μ m
 - OUTER JACKET DIAMETER: 5.5 mm
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
 - 5 ENVIRONMENTAL PERFORMANCE -40°C TO +85°C
 - 6 IP67 RATED
 - 7 CABLE, EXTRANAL PLUG COMPONENTS AND CAP ARE UV STABLE
 - 8 CLIP DELIVERED SEPARATE IN THE BAG WITH THE ASSEMBLY

LABEL DETAIL: 3



| Qty | Description | Item |
|-----|--|------|
| 1 | SC DUPLEX CLIP | 10 |
| 1 | FOAC ODVA WARNING LABEL WITH CE-MARKING | 9 |
| 1 | FOAC INFORMATION LABEL | 8 |
| 1 | LABEL "B" | 7 |
| 1 | LABEL "A" | 6 |
| 2 | SC CONNECTOR ASSEMBLY, MULTI MODE, BEIGE | 5 |
| 2 | FOAC PROTECTIVE TUBING, BLACK | 4 |
| 1 | FOAC HEAT SHRINK TUBING, BLACK | 3 |
| 1 | PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP | 2 |
| L | FOCAB 5.5 mm 2FOLD, MULTI MODE 62.5/125, BLACK | 1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|----------------------|-----------|---|---|
| DWN: R. COOLEN | 03SEP2008 | | FIBER OPTIC LEAD 5.5 mm LC/DPX WITH ODVA ADAPTER - SC/DPX MULTI MODE 62.5/125 |
| CHK: A. HENGELMOLEN | 03AUG2010 | | |
| APVD: A. HENGELMOLEN | 03AUG2010 | | |
| PRODUCT SPEC | | | |
| DIMENSIONS: mm | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | |
| | | 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - | |
| MATERIAL: - | | FINISH: - | |
| WEIGHT: - | | SCALE: A2 00779 | |
| CUSTOMER DRAWING | | SCALE: NTS SHEET 1 OF 1 REV C | |