

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: 0268 & P/N: 0148/0  
INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
BODY: BRASS. 100 TO 160μ [2.54 TO 4.06 μm] TIN PLATED.

CONTACT: COPPER ALLOY. 100 TO 160μ [2.54 TO 4.06 μm] TIN PLATED.

SPRING: COPPER ALLOY.

3. P/N W-700/COLOR  
28AWG 7x36 TINNED COPPER  
0.035 [0.89] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE:  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

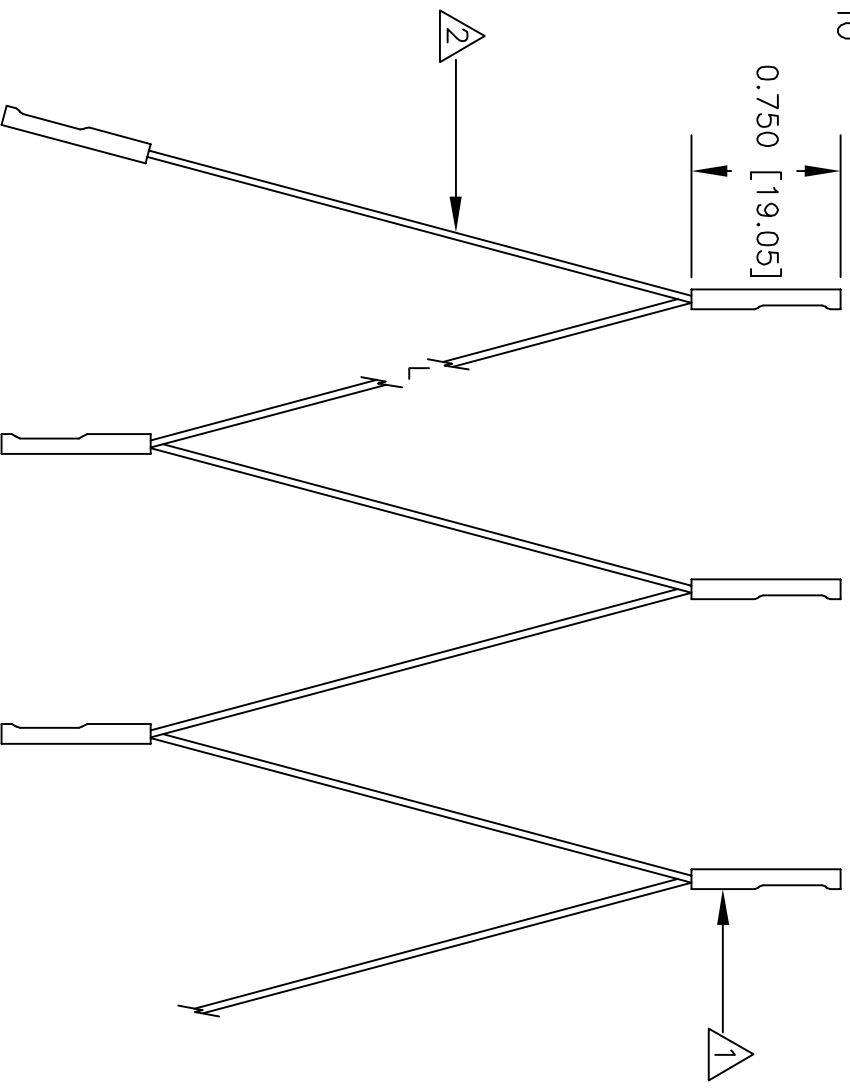

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
MATERIAL SEE NOTE.		DRAWN	
FINISH SEE NOTE.		APPROVED BY	
APPLICATION USED ON			
DO NOT SCALE DRAWING			

<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION	
E-Z-LINK 0.025" [0.63] SQ. SKT CONT. JUMPER	
SIZE	CODE IDENT NO. DRAWING NO.
A	08505 LT
SCALE	1:1
SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.