
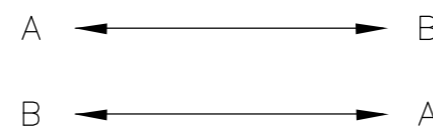


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	B	REVISED PER ECR-08-015371	20JUN08	JWD JD

- MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 1.50dB/km. AT 1300nm. (SEE TABLE)
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

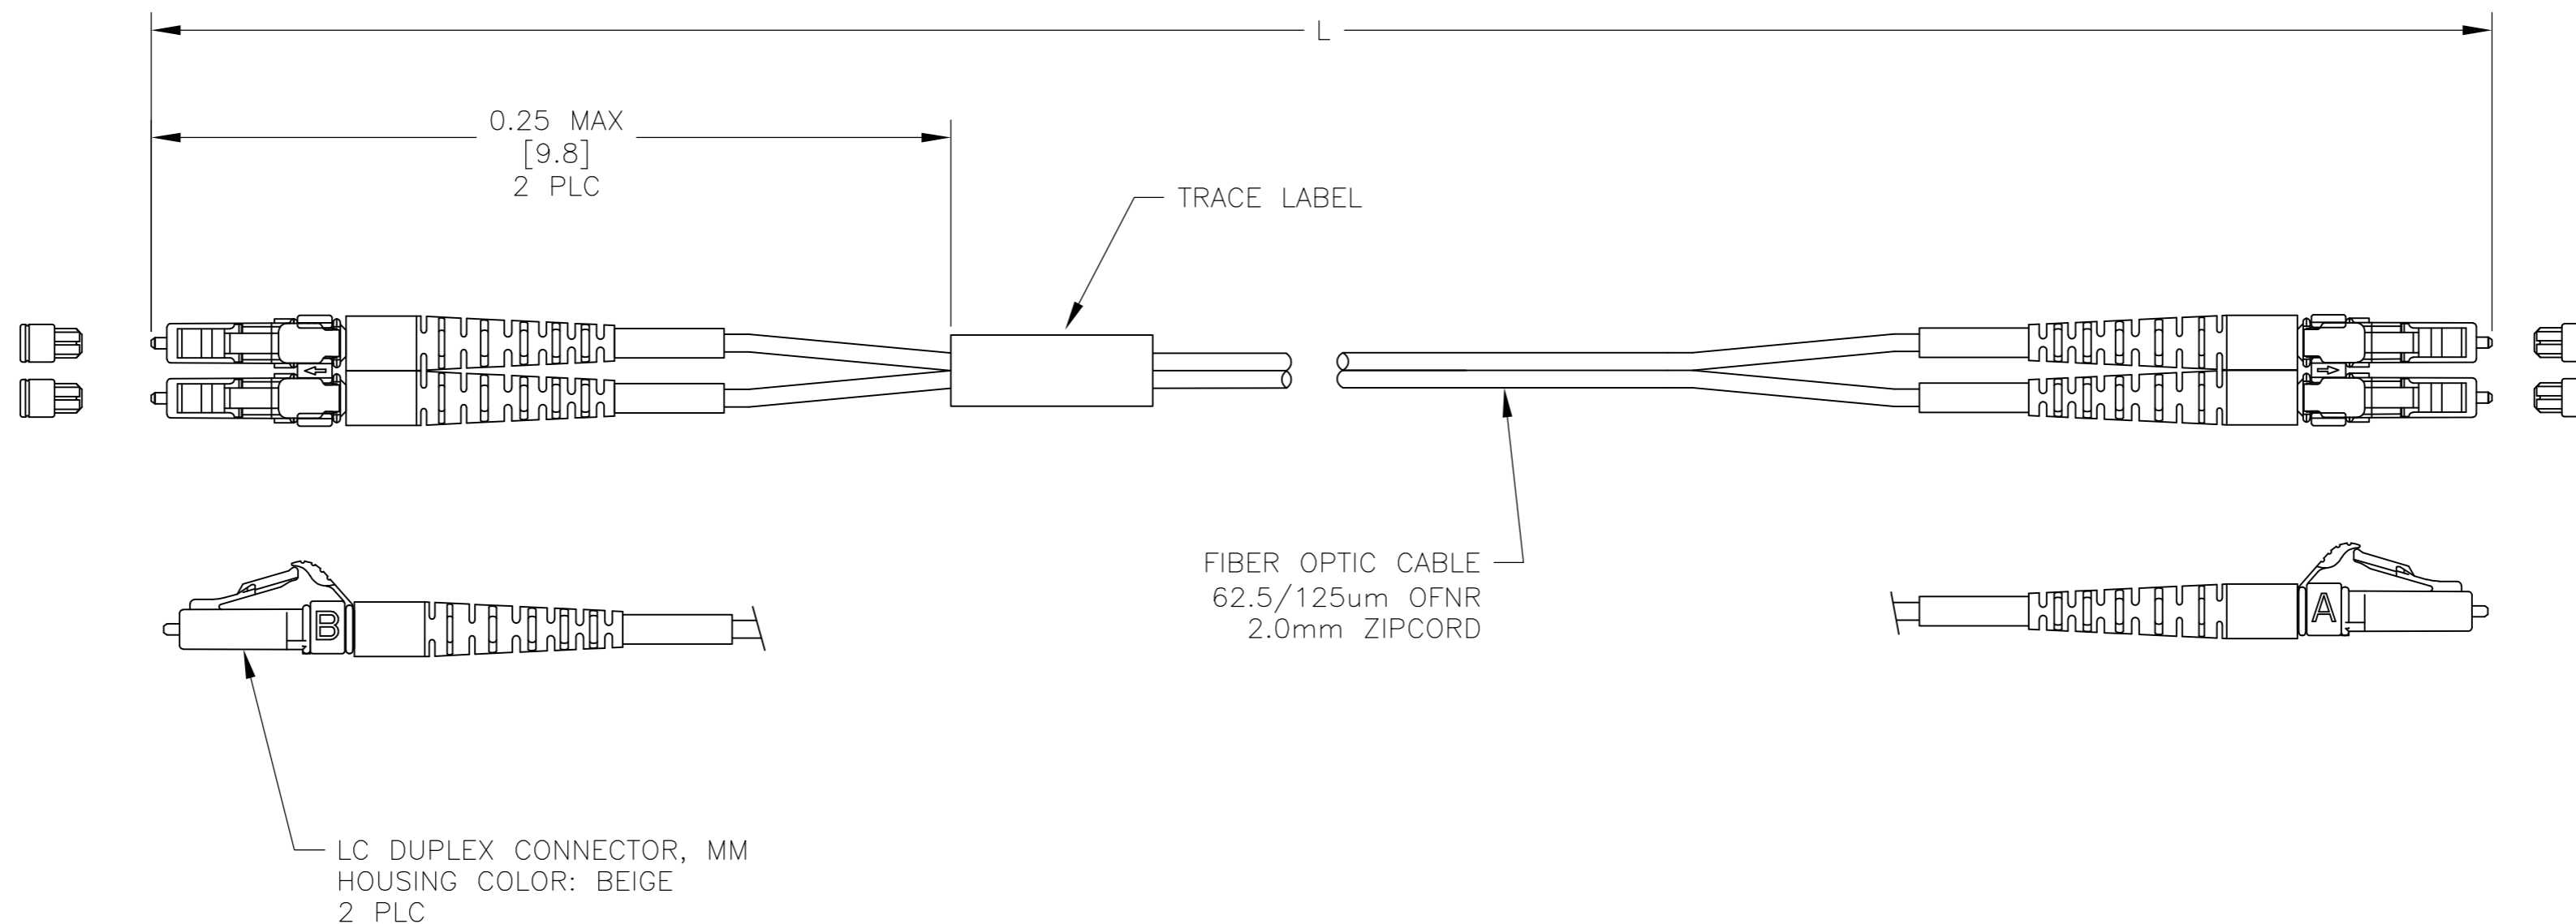

0.51	5.00±0.08 [196.8±3.0]	6660196-5
0.51	9.14±0.15 [360.00±5.9]	6660196-4
0.54	24.38±0.24 [960.00±9.6]	6660196-3
0.50	1.00±0.05 [39.4±2.0]	6660196-2
0.50	3.00±0.05 [118.1±2.0]	6660196-1
MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W. DAVIS 13SEP05	Tyco Electronics Corporation	
DIMENSIONS: METERS [INCHES]		CHK J. DUNCAN 13SEP05	Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. McCORKEL 13SEP05	NAME	
0 PLC ± -		PRODUCT SPEC	CABLE ASSEMBLY, FIBER OPTIC, 62.5/125um OFNR 2mm ZIPCORD LC DUPLEX TO LC DUPLEX	
1 PLC ± -		APPLICATION SPEC	SIZE A2	CAGE CODE 00779
2 PLC ± -		WEIGHT -	DRAWING NO C-6660196	RESTRICTED TO -
3 PLC ± -		CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1
4 PLC ± -				REV B
ANGLES ± -				
FINISH -				