


RECOMMENDED P.C.B. LAYOUT

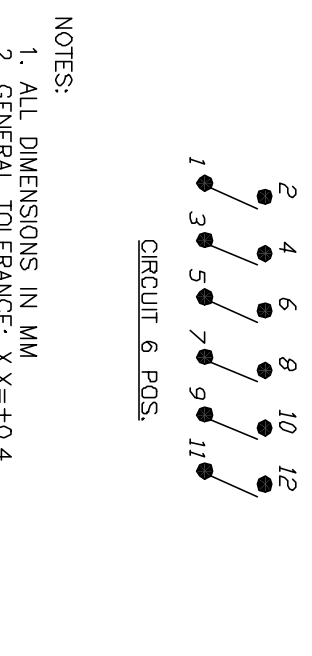

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC. (Carry)
 5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) Copper w/Gold Plate
TERMINALS: BRASS w/Gold Plate
 6. INSULATION RESISTANCE:
100 Mega-OHMS min. @500VDC
 7. CONTACT RESISTANCE:
50 MILLI-OHMS typical @2-4VDC @100mA
 8. OPERATING TEMP.:-40°C to +80°C
 9. PACKAGE: IN DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.
 10. TOP TAPE SEAL FOR FLUX WASH

E-SWITCH®

| | | | | | | | | | | | |
|---|---------|-------------------------|---------|---------|--|-----|--|---------|--|-----|--|
| TITLE | | SCALE | | DATE | | DR | | DWG | | REV | |
| KAJ06 TA GT LDW PROFILE W/TAPE SEAL | | 2:1 | | 6/14/02 | | CJB | | W823326 | | A | |
| REV. | ECN No. | DESCRIPTION | DATE | CHKD | | | | | | | |
| A | 12416 | RELEASED FOR PRODUCTION | 9/12/02 | CJB | | | | | | | |
| <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p> | | | | | | | | | | | |