


Specification Sheet

Part Number: RT50S9C2

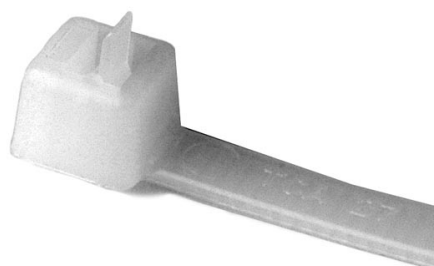

Releasable Cable Tie, Release Tab, 6.3" Long, 50 lb Tensile Strength, PA66, Natural, 100/pkg

Article Number	115-06319
Type	RT50S
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none">• Special extended-pawl design offers a release feature for quick and easy access to wire bundles.• Head design provides high tensile strength with very low insertion force even after repeated use.• Bent tail ensures a quick and simple installation.
Quantity Per	bag

Product Description

HellermannTyton Releasable Cable Ties offer a release feature in the head allowing for easy access to wire bundles when changes are necessary. The head design guarantees high tensile strength even after repeated use, as well as a low insertion force. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

Short Description	Releasable Cable Tie, Release Tab, 6.3" Long, 50 lb Tensile Strength, PA66, Natural, 100/pkg
Global Part Name	RT50S-PA66-NA
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	6.3
Length L (Metric)	160.0
Identification Plate Position	none
Releasable Closure	Yes
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	1.38
Bundle Diameter Max (Metric)	35.0

Thickness T (Imperial)

0.05

Thickness T (Metric)

1.2

Height H (Imperial)

.06

Height H (Metric)

1.40

Material

Polyamide 6.6 (PA66)

Material Shortcut

PA66

Flammability

UL 94 V2

Operating Temperature (Metric)

-40°F to +185°F (-40°C to +85°C)

Reach Complaint(Article 33)

Yes

ROHS Complaint

Yes

Certification/Specification WEB

UL-ZODZ2.E64139

UL Recognized (US)

Yes

UL Recognized (US and Canada)

Yes

Package Quantity(Imperial)

100

Package Quantity (Metric)

100

Customs Number

3926909987

Content Unit(BMEcat)

pcs.

Weight (Metric)

1.2