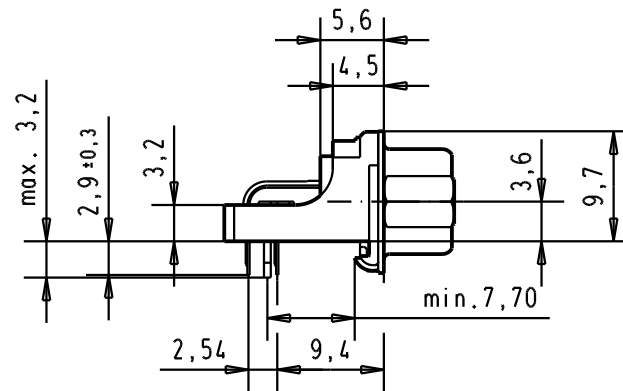
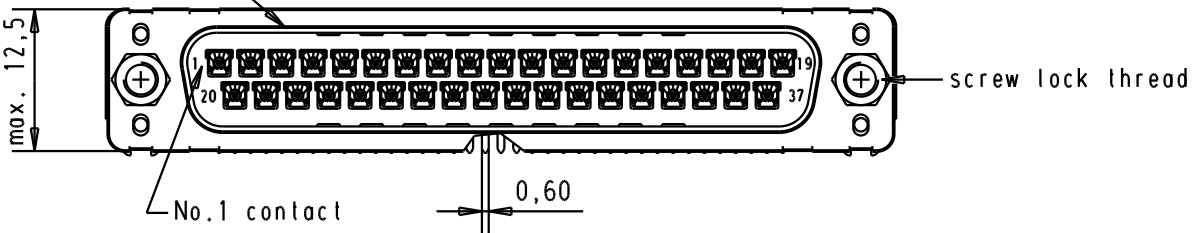
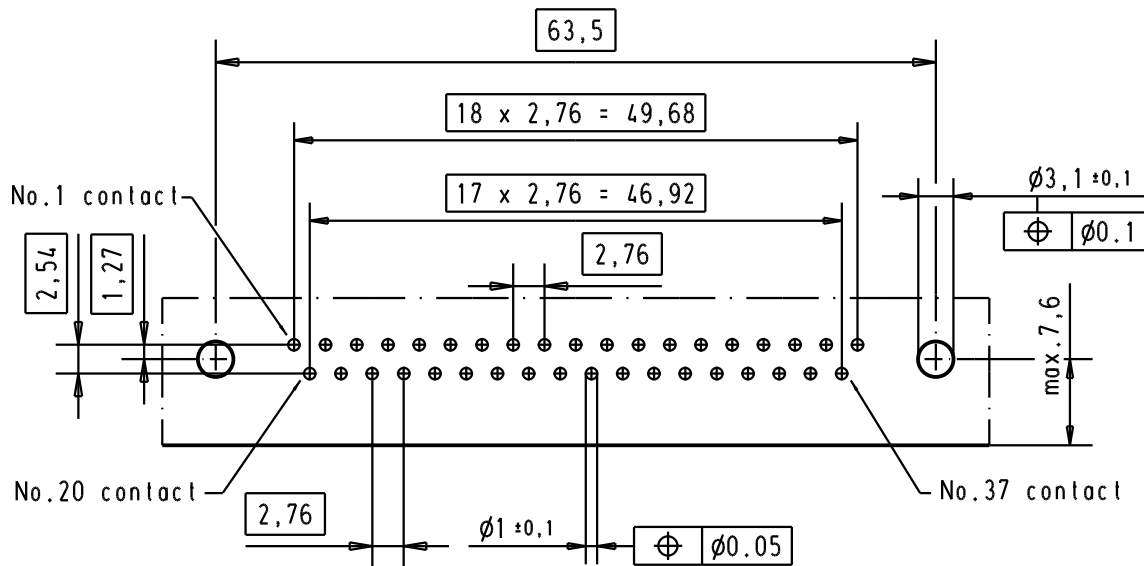
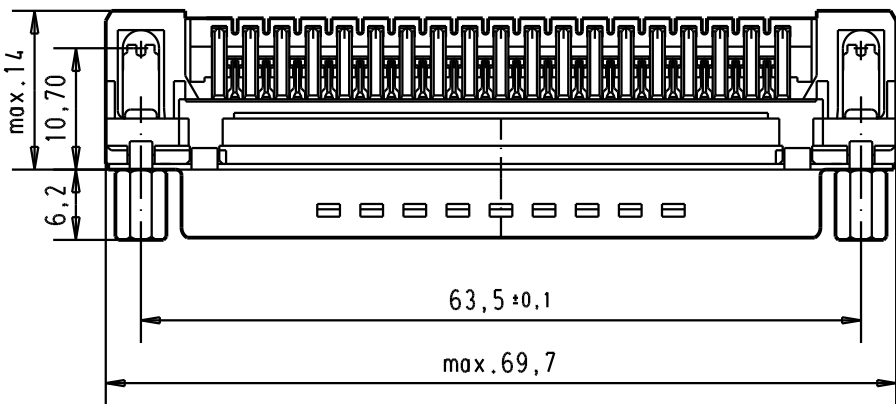


5 4 3 2 1



Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802



Printed board layout component side



Connector retention and assembling forces on the PCB = 25 / 80 newtons

A	Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, high temperature, male, low profil, 37 poles, with solder pins 2.9, screw lock and grounding board lock.	Maßstab/Scale 1.5:1
	09 65 466 3817	4-40 UNC	1	31892	22/04/04	JH	Detail. 05/03/02	CV			
	09 65 466 6817	4-40 UNC	2	31084	04/09/02	YT	Insp.				
	09 65 466 7817	4-40 UNC	3	29723	05/03/02	CV	Stand.			TB 0965466x81x	Blatt/ Page 5
	Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris				