
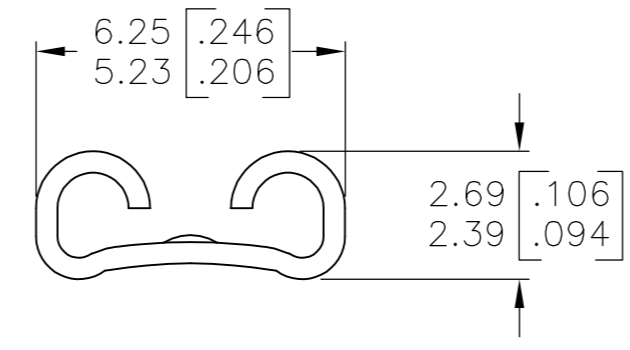



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	J	REVISED PER ECR-12-013518	23NOV2012	KH PD

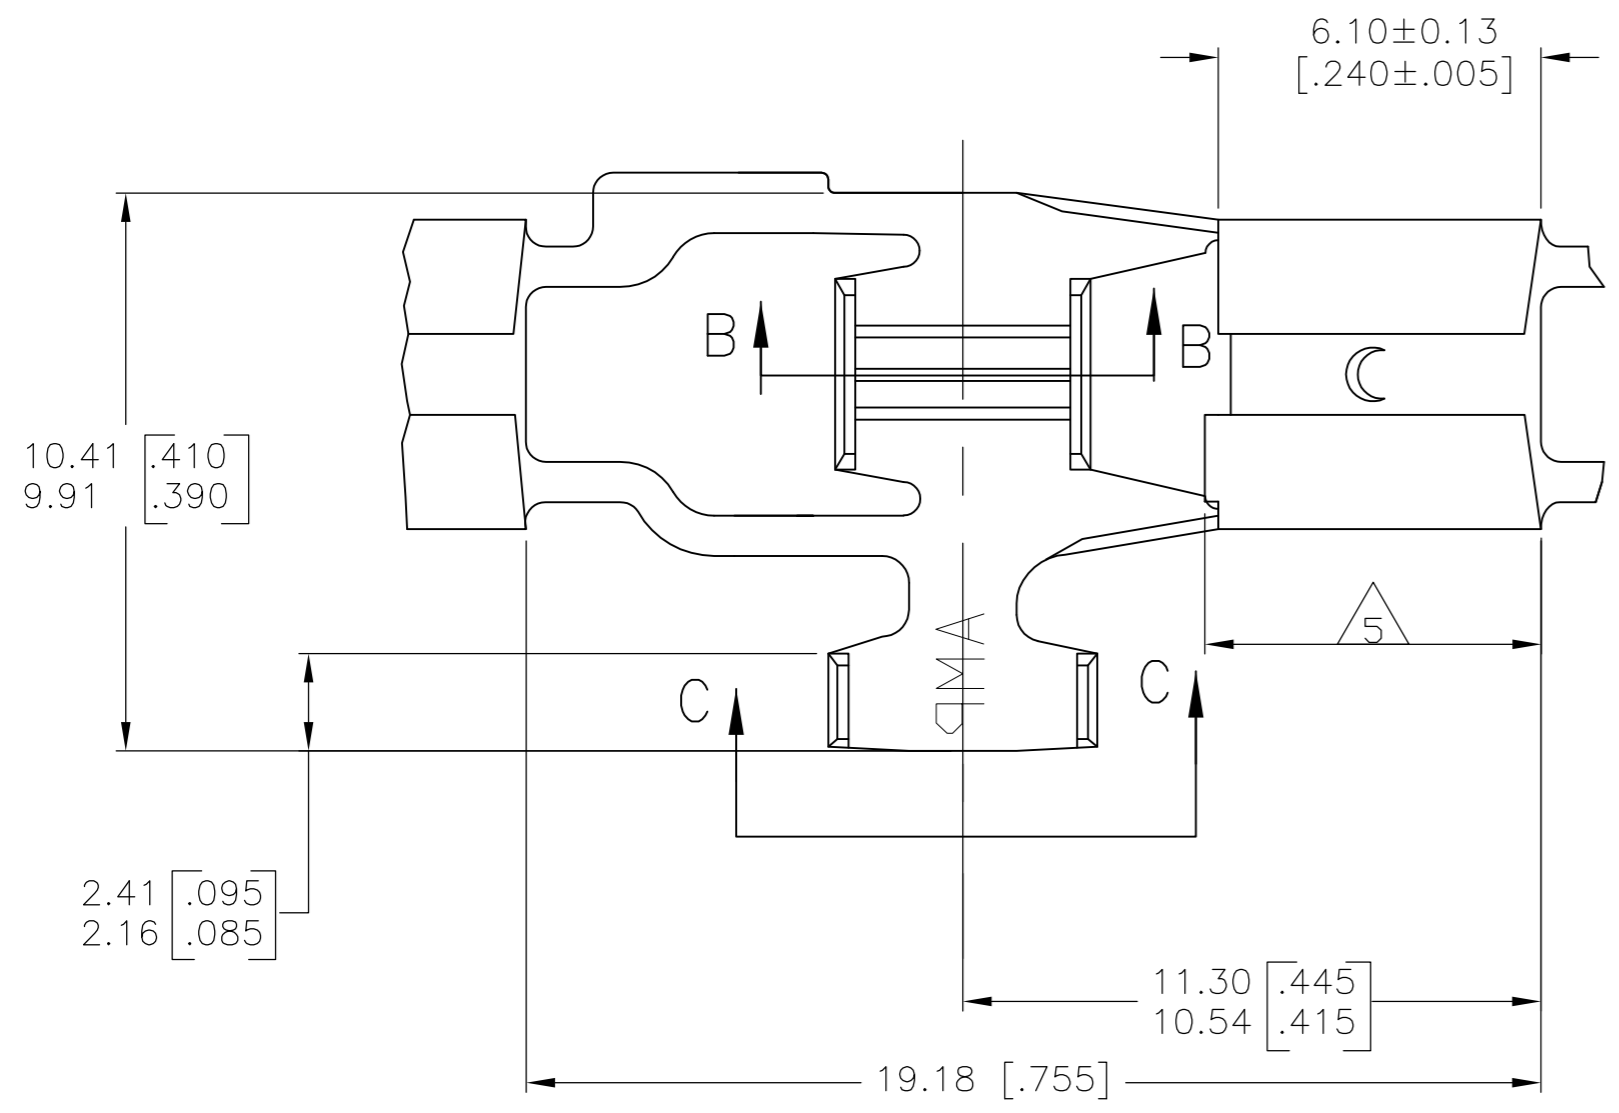


VIEW A-A

- 1 CONTINUOUS STRIP ON REELS.
- 2 MATING TAB THK TO BE 0.508±0.025 [.020±.001]
- 3 WIRE SIZE IS #18-#14 AWG.
- 4 INSULATION RANGE IS 1.52-3.81 [.060-.150] DIA.
- 5 RECEPTACLE LENGTH CAN BE GREATER BY UP TO 0.25 [.010] MAX FROM THE OPPOSITE SIDE.

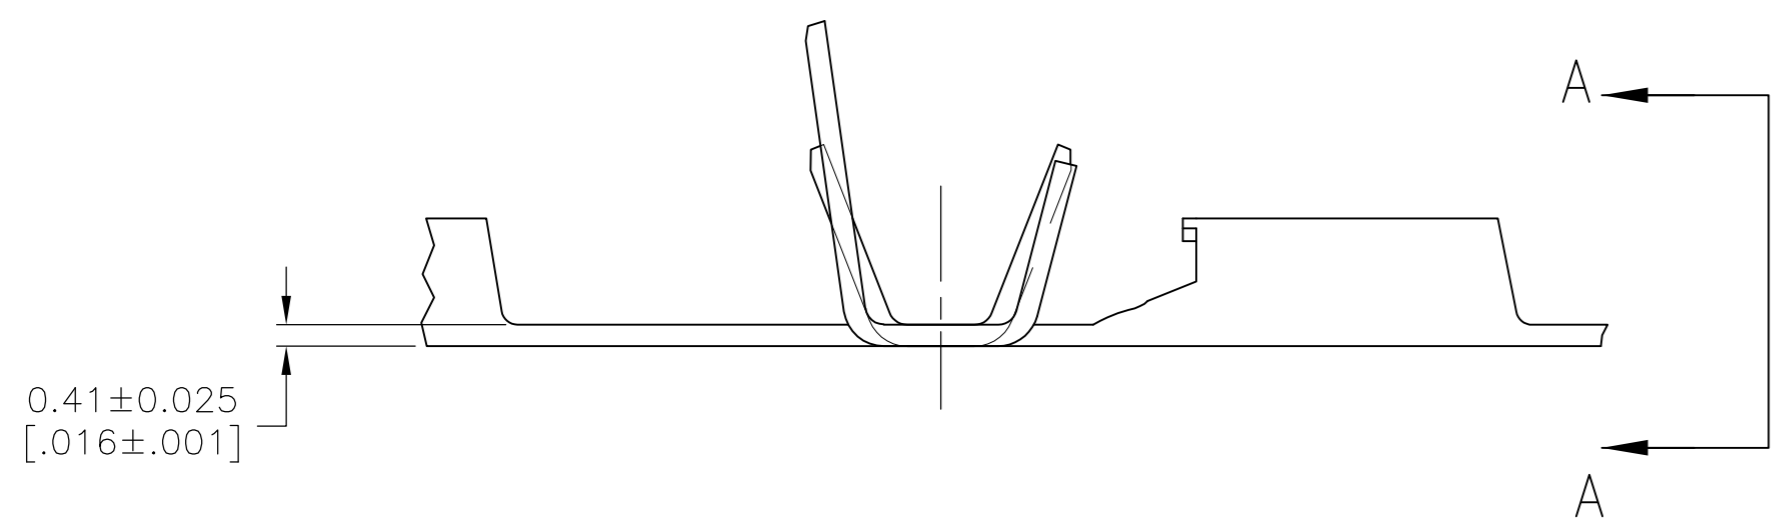

SECTION B-B

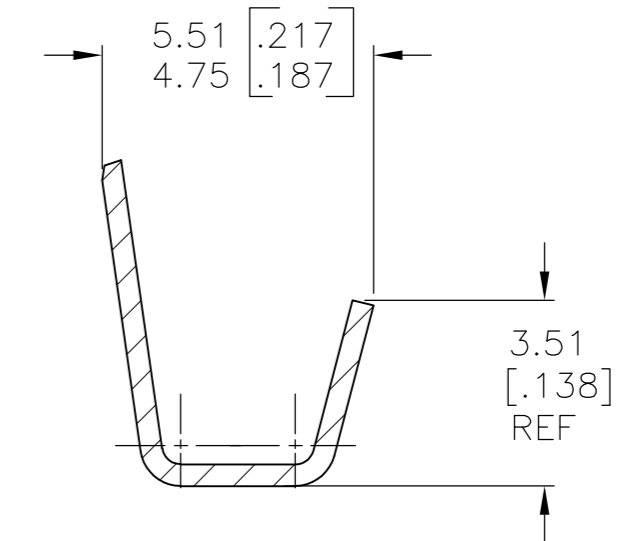

SECTION C-C

PART NO	WIRE		INSULATION DIAMETER (MAX)	WIRE BARREL CRIMP			TENSILE STRENGTH POUNDS	
	QTY	SIZE AWG		WIDTH	CRIMP HEIGHT	CRIMPER		ANVIL
63512-1	1	14	.150	.120	.071	F	FLAT	50
	1	16			.063			30
	1	18			.057			20

OBSOLETE		.000080 MIN TIN	63512-4
OBSOLETE	REVERSE REELING		63512-3
			63512-1
	REELING	FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN JR RUTH 9/29/88	 TE Connectivity RECEPTACLE, FLAG, FASTON, 4.75 [.187] SERIES
	0 PLC ± -	CHK MS FEHER 9/30/88	
	1 PLC ± -	APVD C MEYERS 9/30/88	
	2 PLC ± 0.25 [.010]	NAME	
	3 PLC ± -	PRODUCT SPEC	
MATERIAL BRASS	FINISH SEE TABLE	APPLICATION SPEC	SIZE A2
		WEIGHT -	CAGE CODE 00779
			DRAWING NO C-63512
			RESTRICTED TO -
			SCALE 4:1
			SHEET 1 of 1
			REV J

CUSTOMER DRAWING