


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 18.0 GHz
 - 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
 - 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
 - 1.4 IMPEDANCE: 50 OHMS
 - 1.5 VSWR: 1.10+0.01f(GHz)
- 2.0 MATERIALS:
 - 2.1 HOUSING AND COUPLING NUT:
STAINLESS STEEL NON-MAGNETIC PER
ASTM-A582, TYPE 303.
 - 2.2 CENTER CONTACT: BERYLLIUM COPPER ROD
ALLOY C172 TEMPER H, PER ASTM-B196.
 - 2.3 DIELECTRIC: PTFE FLOUROCARBON PER
ASTM-D1457.
- 3.0 FINISHES:
 - 3.1 HOUSING AND COUPLING NUT:
PASSIVATED PER MIL-F-14072 AND QQ-P-35C, TYPE IV
 - 3.2 CENTER CONTACT: GOLD PER MIL-G-45204,
TYPE II, CLASS 1.
- 4.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-09035-27-38)
- 5.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

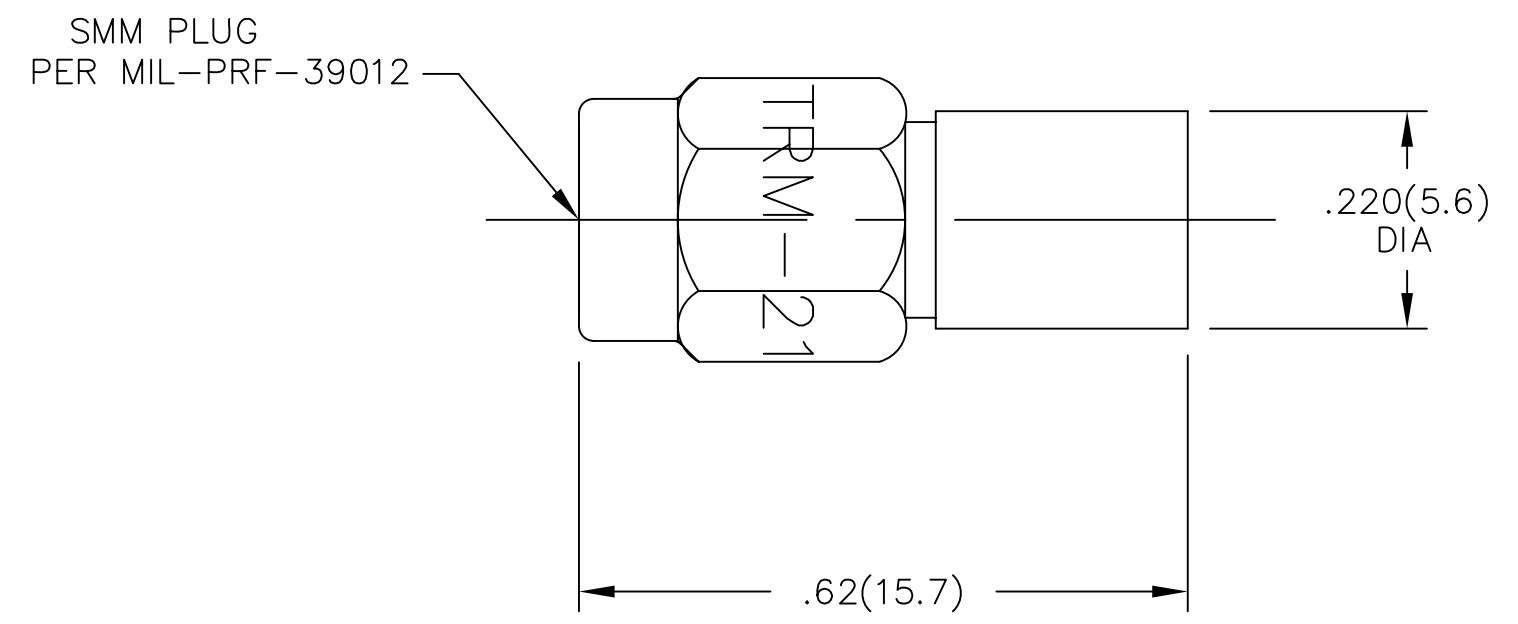

DATE	5/13/03
DESCRIPTION	RELEASED
REV.	-

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO.	34078		MIDWEST MICROWAVE	
	3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION - SMM PLUG	
	DRAWN/DATE S.ORLOV 5/12/03	ENG./DATE G.KOZAK 5/13/03	DRAWING NUMBER TRM-2181-MO-SMM-02		
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1	