

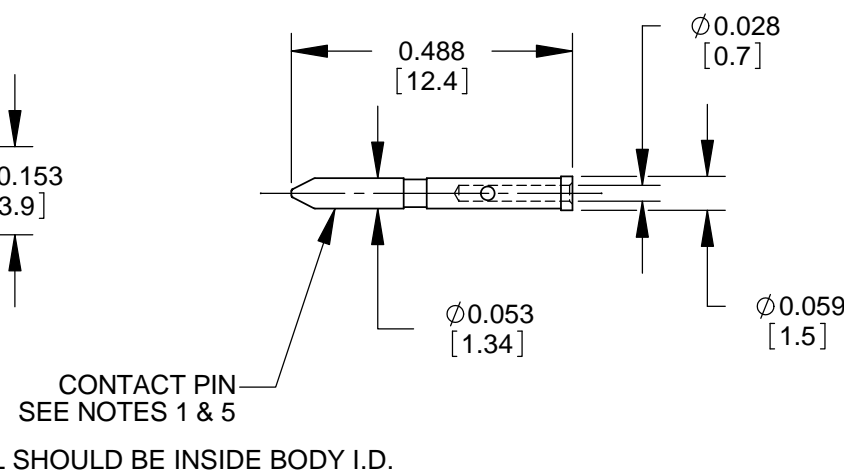


ALTERNATE KNURL DESIGN

RECOMMENDED
CABLE STRIPPING DIMENSIONS
SWITCHCRAFT STRIPPING TOOL #PTS1

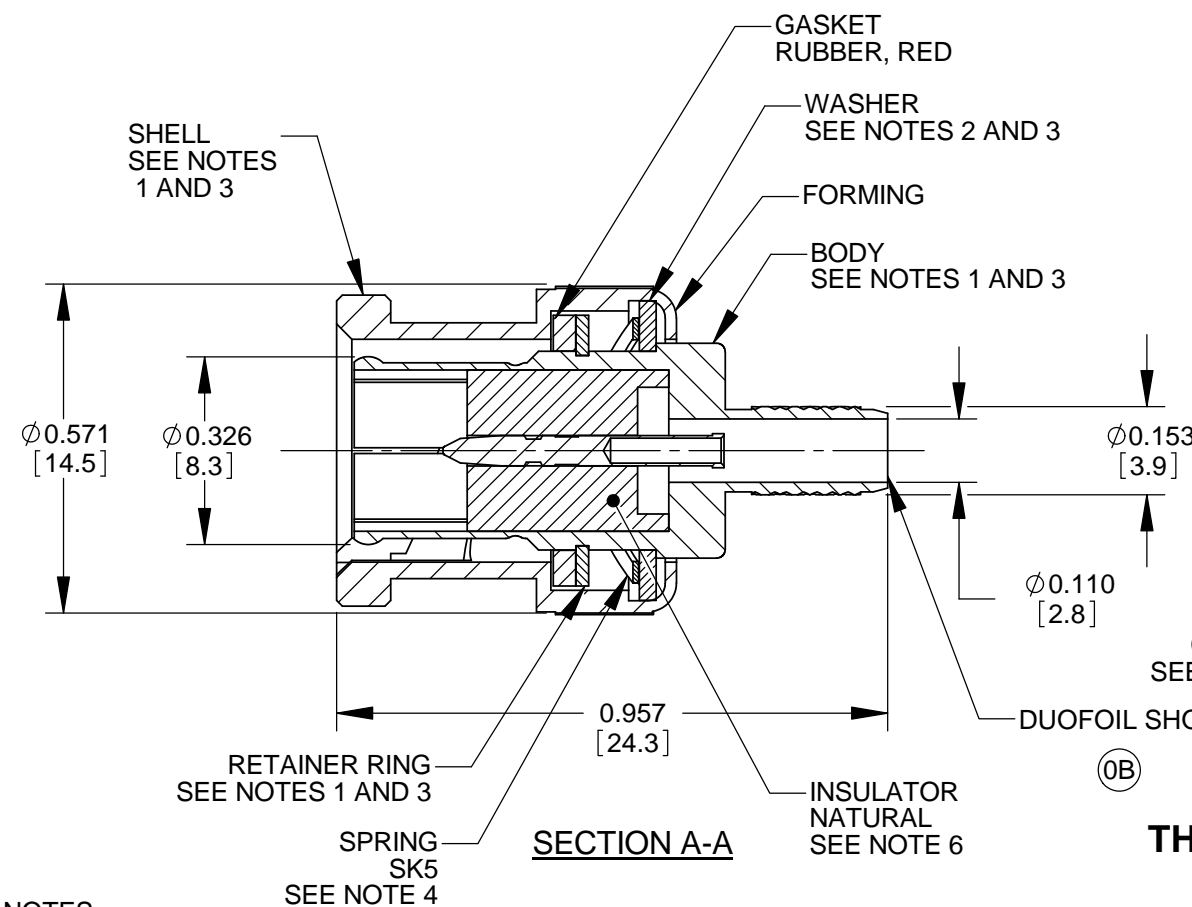

CONTACT PIN
SEE NOTES 1 & 5

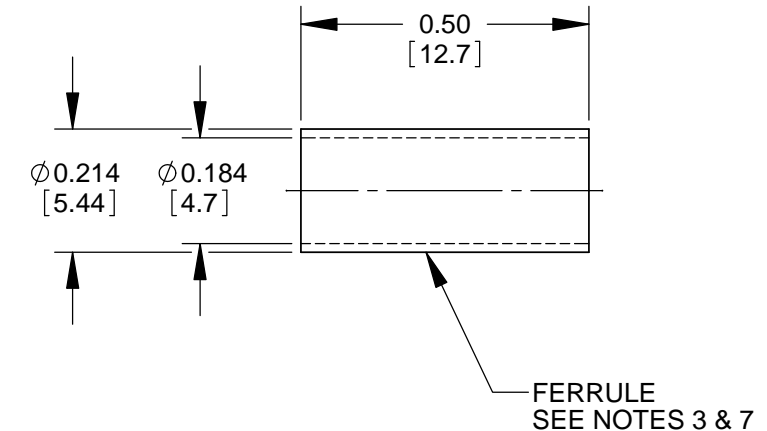

FERRULE
SEE NOTES 3 & 7

THIS PRODUCT MEETS SMPTE ST 2082-1 THROUGH 24 GHz

PRELIMINARY

CUSTOMER DRAWING

NOTES:

FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- BRASS PER QQ-B-613
- NICKEL PLATING 100 MIN THICK OVER COPPER STRIKE.
- NICKEL PLATING 200 MIN THICK OVER COPPER STRIKE.
- GOLD PLATING 50 MIN THICK OVER NICKEL PLATING 100 MIN THICK OVER COPPER STRIKE.
- TEFLON MIL-P-19468
- JIS H 3250, C2600
- CRIMPED FERRULE HEX CRIMP SIZE 0.178.
- CRIMPED CONTACT PIN SQUARE CRIMP SIZE 0.042OR HEX CRIMP SIZE 0.041.
- ALL DIMENSIONS ARE REFERENCE.
- THIS PRODUCT IS RoHS COMPLIANT.

| REV | ECO NUMBER | DATE | BY | APVD |
|-----------|------------|---------|-----|------|
| 0B | ADDED NOTE | 11-8-16 | SRC | SRC |
| REVISIONS | | | | |

☆ STAR SYMBOL DENOTES CRITICAL DIMENSION

UNLESS OTHERWISE SPECIFIED

- ALL DIMENSIONS IN INCHES
- TWO PLACE DECIMALS ±0.01
- THREE PLACE DECIMALS ±0.005
- ANGLES ±1°
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.
- FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002
- REMOVE ALL BURRS

DO NOT SCALE DRAWING

| | | | | | | | | | |
|--|-------|------|----------|--------|----------|--|--|-----|--|
| THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY. | | | | | | | | | |
| SIZE | WIDTH | MULT | LBS/M | TEMPER | | | | | |
| FINISH | | | | | MATERIAL | | | | |
| SPEC No. | | | | | SPEC No. | | | | |
| FIRST USED ON | | | | | SCALE | | | | |
| | | | | | 3:1 | | | | |
| DATE DRAWN | BY | CHKD | APVD | | | | | | |
| 10-17-16 | SRC | SRC | * | | | | | | |
| | | | 10-17-16 | | | | | | |
| NAME | | | | | PART No. | | | REV | |
| UHD BNC CONNECTOR | | | | | UHDBNC55 | | | 0B | |
| 1855A CABLE, RoHS | | | | | | | | | |