


Extended length is with 500g of force

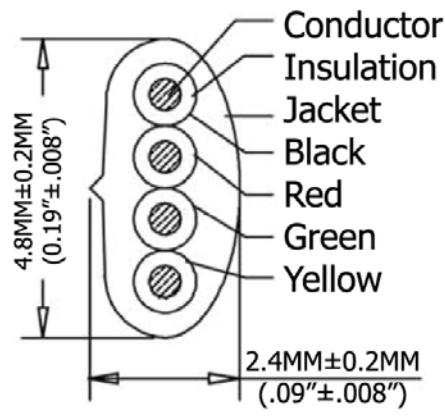

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	18.5 Inches
2,133.6MM-2,453.64MM	469.9MM

- Material:**
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
  - Insulation(X4C):PP6331 ID 0.95-1.0
  - Jacket: PVC NO UL 80P
  - Package: Individual PE Bag

SEC:A-A



Scale	1:1					Name	Item No. <b>AT-K-C-26-4-S/7</b>
TOLERANCE					Drawn	11.02.11	
X.X	±0.40				Approved		Title NON-UL 26AWG (0.16/7)*4C, O.D.: 2.4*4.8MM, Pre-Cut, 7Ft. Silver
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						<b>rev00</b>
							Replace
							Sheet

