

SUMMARY

Wires

Low	5
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	2.70 - 3.90 mm
Matching parts	PLA.M0.5TL.LN
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PA*: Straight plug with cable collet
Keying	2 keys (alpha=40; Plug: male contacts; Receptacle: female contacts)
Housing Material	PEI (Polyetherimide), black
Cable Fixing	∅ 2.7 - 3.9 mm
Variant	N : Black collet nut

Performance

Configuration	1P.M05 : 5 Low Voltage
Insulator	
Rated Current	7 Amps

Specifications

Contact Type: Solder
Max. Matings: 2000
Contact Dia.: 0.9 mm (0.035in)
Bucket Dia.: 0.8 mm (0.031in)
Max. Solid Conductor: 0.34 mm ² (AWG 22)
Max. Stranded Conductor: 0.34 mm ² (AWG 22)


R (max): 4.5 mOhm
 Test voltage (kV rms) Contact-contact: 1.05
 Air clearance min. (mm) or Creepage distance min. (mm): 0.8

Others

F ret (min): 50 N
 F ret (max): 150 N
 IP Rating: 50

DRAWINGS

Draws

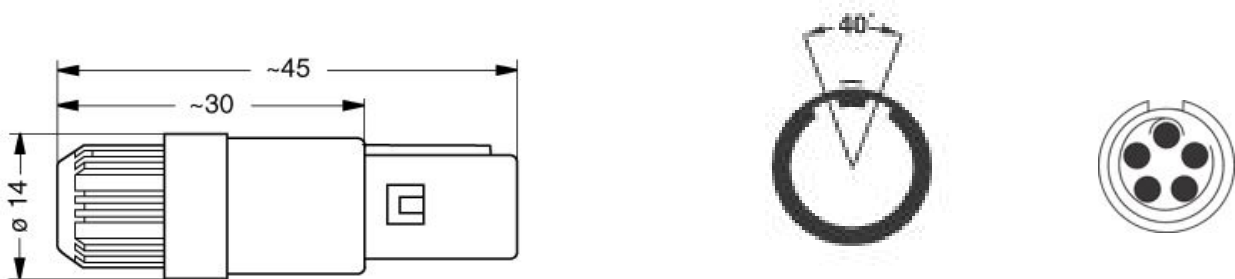

Dimensions

	A	L
mm.	14	45
in.	0,55	1,77

RECOMMENDED BY LEMO


Tools

None

Cables

CMN.05.T28.029PGCE	PVC	GREY	
CMN.05.T28.029PGZE		Grey	
CMN.05.T28.029PNCE	PVC	Black	

Property of LEMO SA. All rights reserved
 This document is not contractual

CMN.05.T28.029PNZE			
005 050	PVC	Black	