


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	2146	INITIAL RELEASE	07/16/2010	LH



- NOTES:**
- INSULATOR MATERIAL: PBT.
 - CONTACT MATERIAL: BRASS.
 - PLATING: GOLD FLASH OVERALL.
 - UL FLAMMABILITY RATING: 94V-0.
 - DIELECTRIC WITHSTANDING VOLTAGE: 650V AC.
 - CURRENT RATING: 3 AMPS PER CONTACT.
 - CONTACT RESISTANCE: 30 MILLI OHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGA OHMS.
 - DOUBLE TUNING FORK TYPE CONTACT, ACCOMMODATES .025"[0.64mm] SQ PINS.
.100"[2.54mm] PITCH LOW-PROFILE MINI TYPE.
 - OPERATING TEMPERATURE: -40° TO +85° C
 - MODIFICATION: CONTINUITY TYPE.

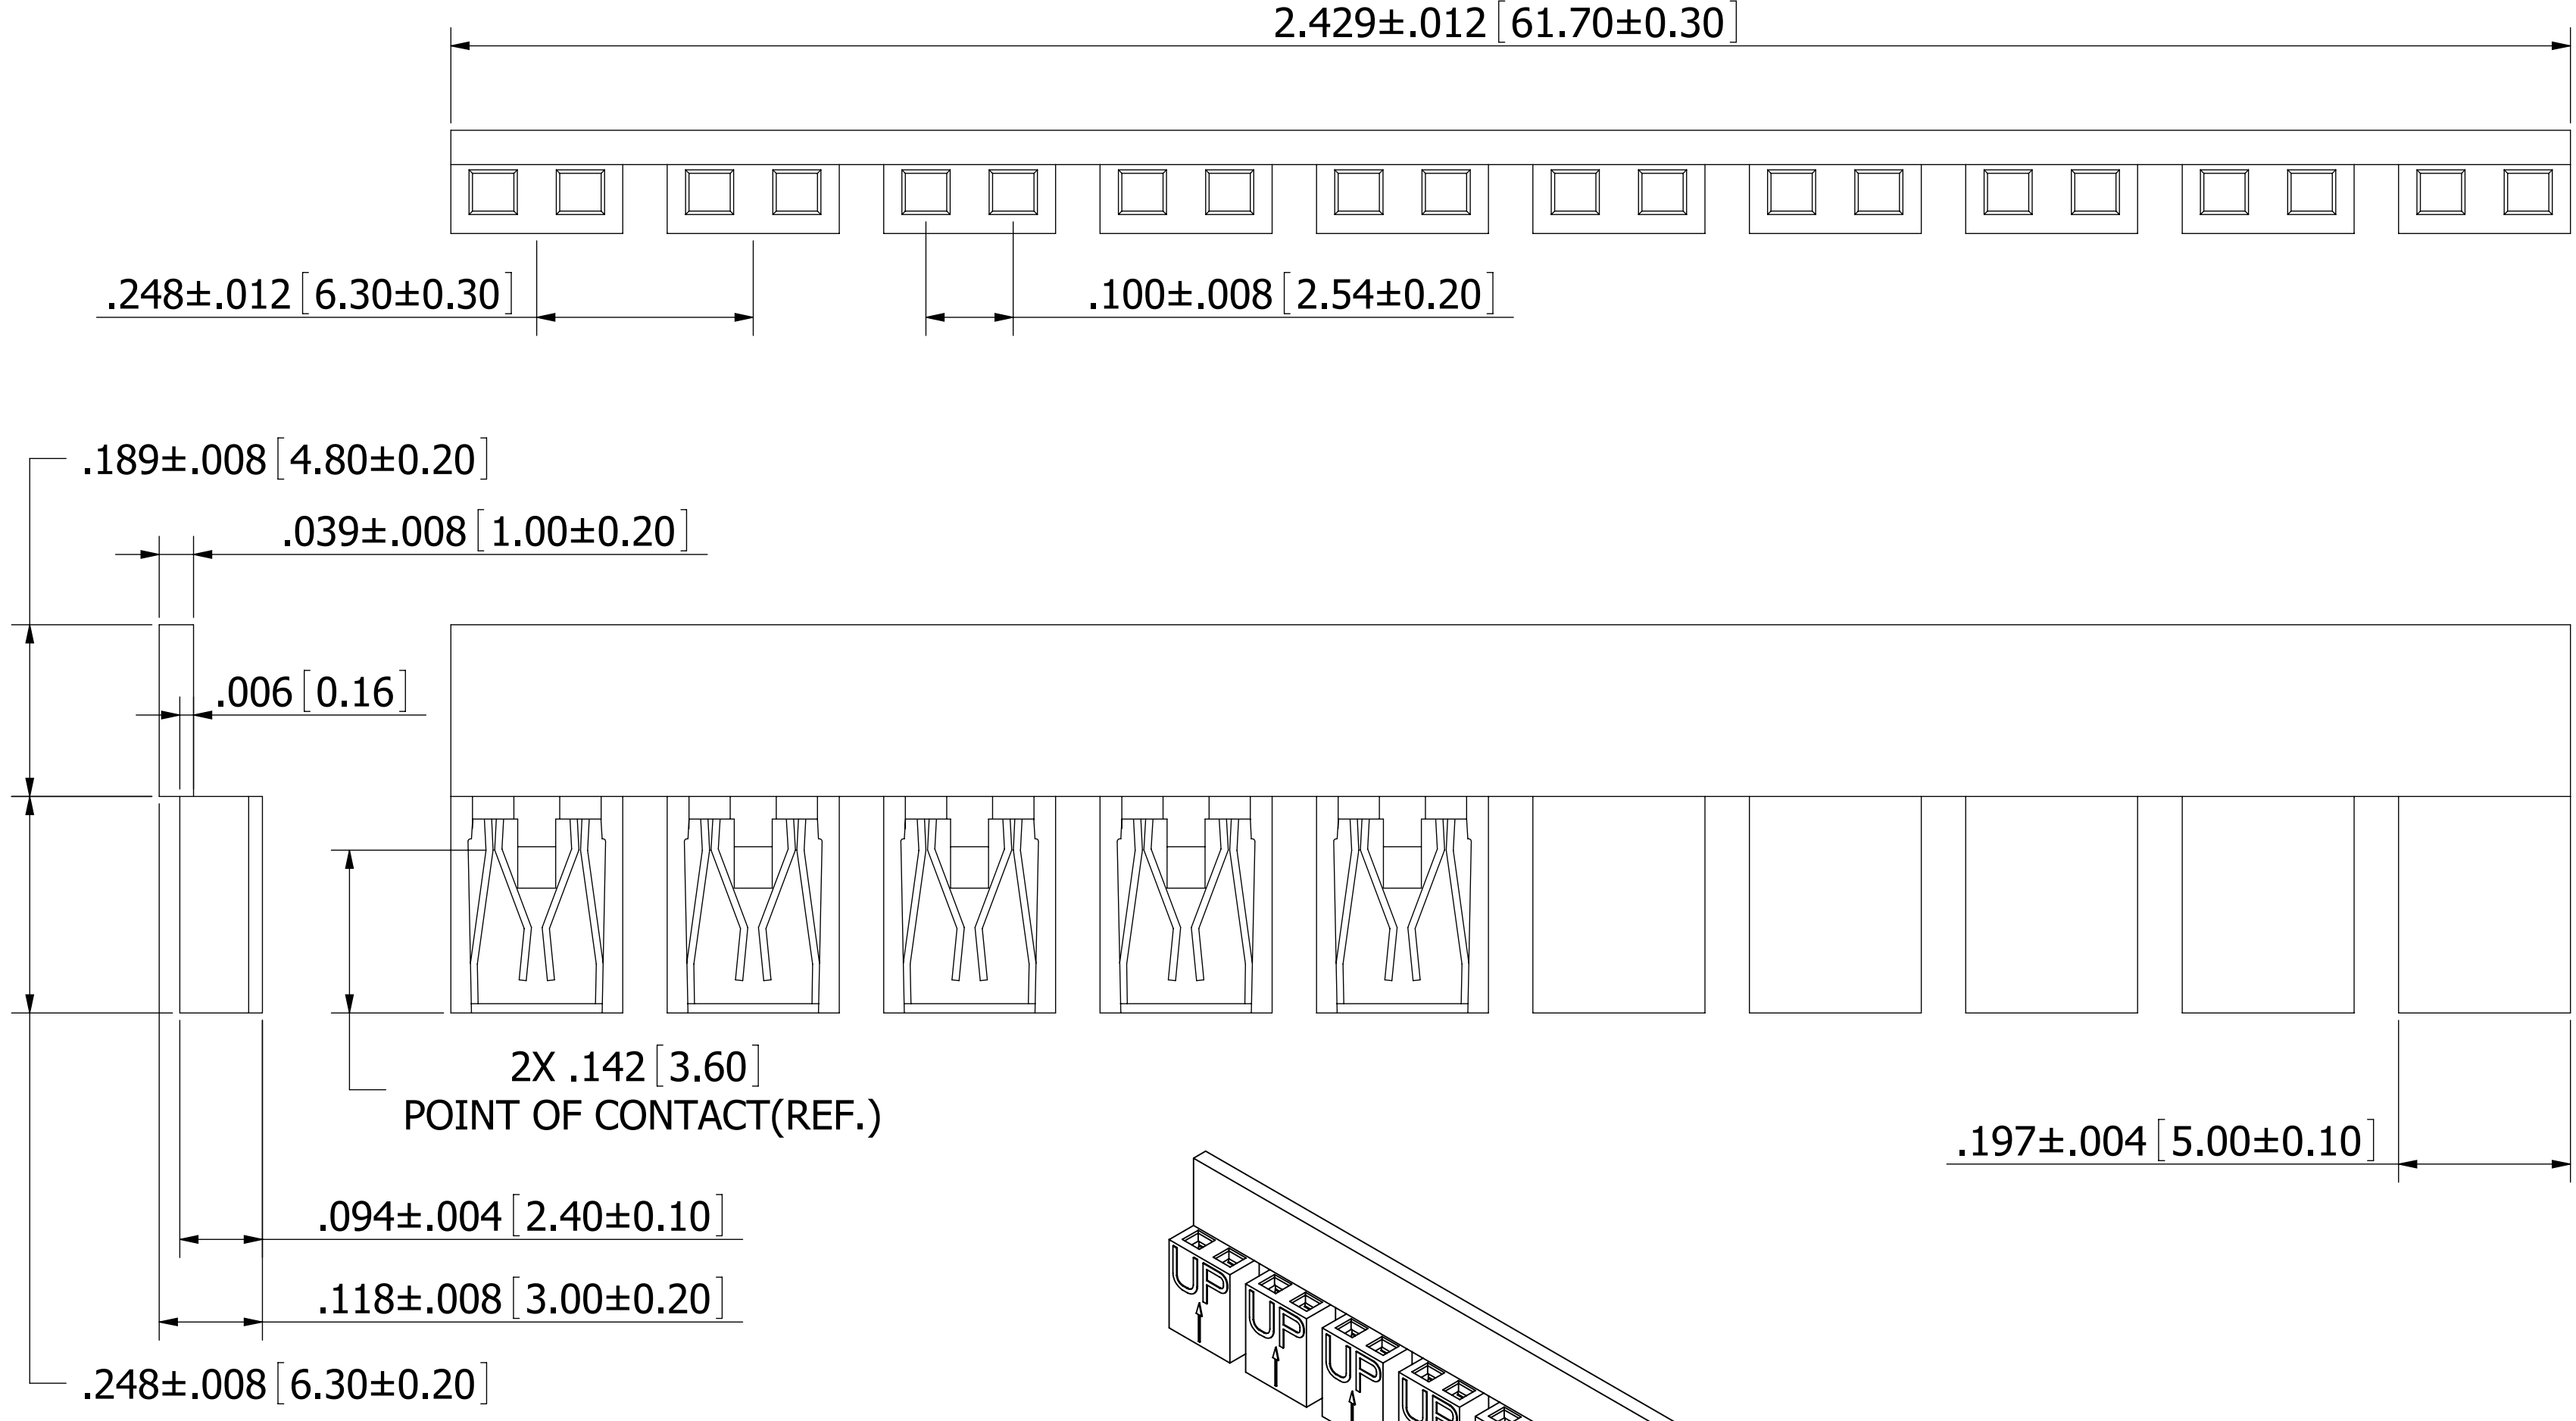

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES[MM]
TOLERANCES:
ANGULAR: ± 30°
.XX=± .012 [.30]
.XXX=± .008 [.20]
.XXXX=± .004 [.10]

INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ASME Y14.5M-2009

DATE	NAME	SULLINS CONNECTOR SOLUTIONS	
DRAWN 7/16/2010	LH	DESCRIPTION MINI SHUNT, .100" CC, OPEN TOP	
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.		PART NUMBER QPC02SXHN-M290RC	
SIZE C	DWG. NO. 11511	REV A	SCALE: 16:1
SHEET 1 OF 1		FILE NAME: Z:\ECO PENDING\JH TEMP\11511, QPC02SXHN-M290RC PRINT: 3/8/2011	