



CS-044 3.2x2.5mm Crystal Resonator

CONNOR WINFIELD



2111 Comprehensive Drive

Aurora, Illinois 60505

Phone: 630-851-4722

Fax: 630-851-5040

www.conwin.com

US Headquarters:

630-851-4722

European Headquarters:

+353-61-472221

Description:

The Connor-Winfield model CS-044 is a 54MHz fundamental mode, AT-cut crystal in a 3.2x2.5mm surface mount package. The CS-044 is designed to be used as a reference crystal in synthesizer applications.

Features:

- Frequency: 54.0 MHz
- Frequency Calibration: +/-15 ppm
- Frequency Stability: +/-25 ppm
- Temperature Range: -40 to 85°C
- Surface Mount Package
- Tape and Reel Packaging
- RoHS Compliant / Lead Free ✓RoHS

Electrical Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Output Frequency (Fo)		54.0		MHz	
Frequency Calibration (@25°C)	-15		15	ppm	
Frequency Stability vs. Change in Temperature (Referenced to the frequency measured @25°C)	-25		25	ppm	
Operating Temperature Range:	-40		85	°C	
Operation Mode		Fundamental			
Cut		AT Cut			
Aging	-1		1	ppm/Year	
Shunt Capacitance: (Co)	-		2.0	pF	
Load Capacitance: (CL)		8		pF	
Equivalent Series Resistance @ 25 °C:			20	Ohms	
Drive Level		10	200	uW	
Insulation Resistance		500		Mohm	@ 100 Vdc
Storage Temperature:	-40		95	°C	


Package Characteristics

Package	Hermetically sealed ceramic 3.2x2.5mm SMD Package.
Leakage	0.01ppm atm, cc/sec. maximum

Ordering Information


CS-044-054.0M

Package Outline

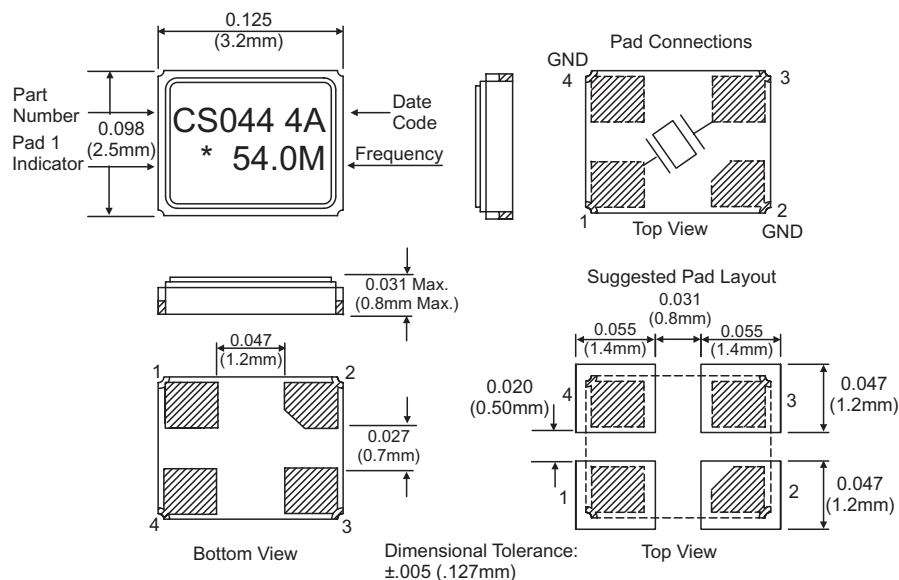



Tape and Reel Information

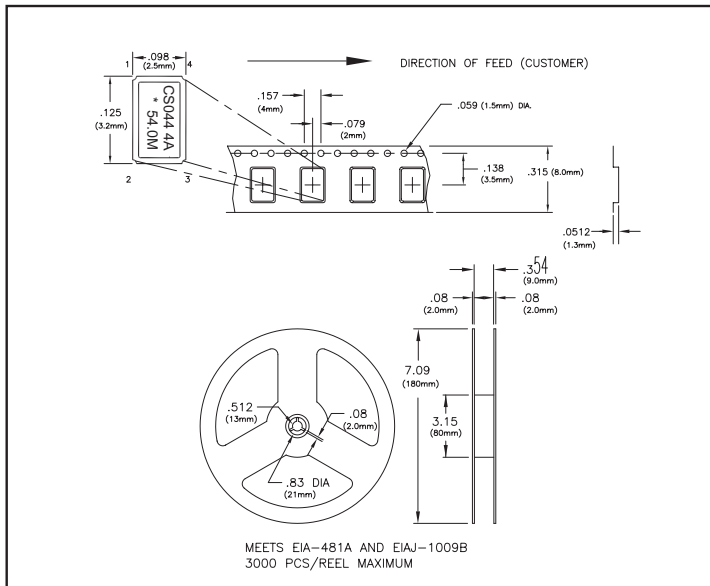

Date Code Information

LASER: 2 Character Date Code


Year Code	Month Code
3 = 2013	A = January
4 = 2014	B = February
5 = 2015	C = March
6 = 2016	D = April
7 = 2017	E = May
	F = June
	G = July
	H = August
	J = September
	K = October
	M = November
	N = December

Date Code Example:


3J

3= 2013, J = September

Marking Information

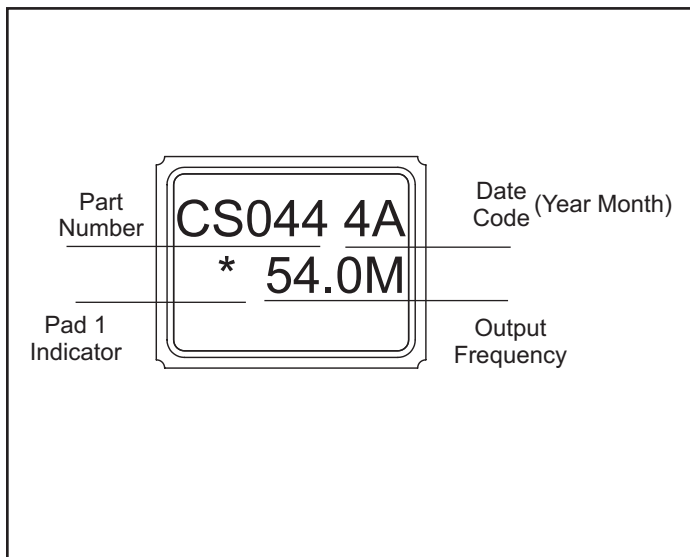

Solder Profile

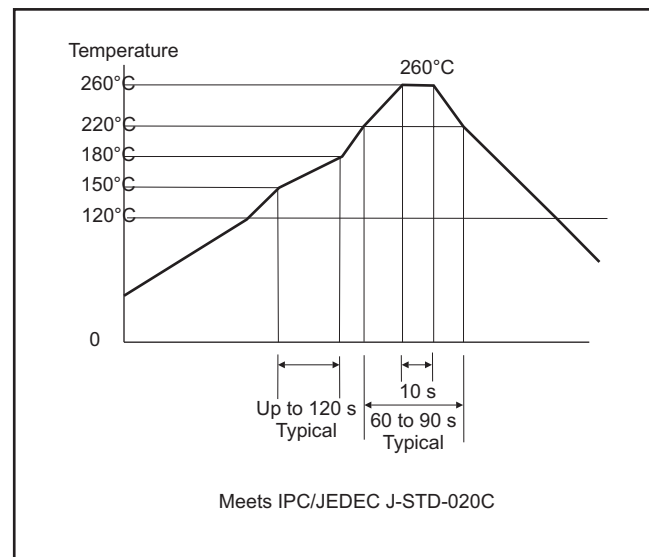

Revision History

Revision	Date	Revision.
00	01/14/14	New Release
01	07/08/14	Update to Electrical Specs
02	08/03/15	Update to Electrical Specs and Digi-Key

Bulletin	Xt390
Page	2 of 2
Revision	02
Date	03 Aug 2015