



| DIMENSIONS: | |
|-------------|------------------------|
| A | 3.125" ±0.063 |
| B | 3.750" ±0.125 |
| C | 3.810" ±0.063 |
| D | 2.500" ±0.063 |
| E | 2.438" ±0.063 |
| G | 0.203" x 0.400" ±0.015 |

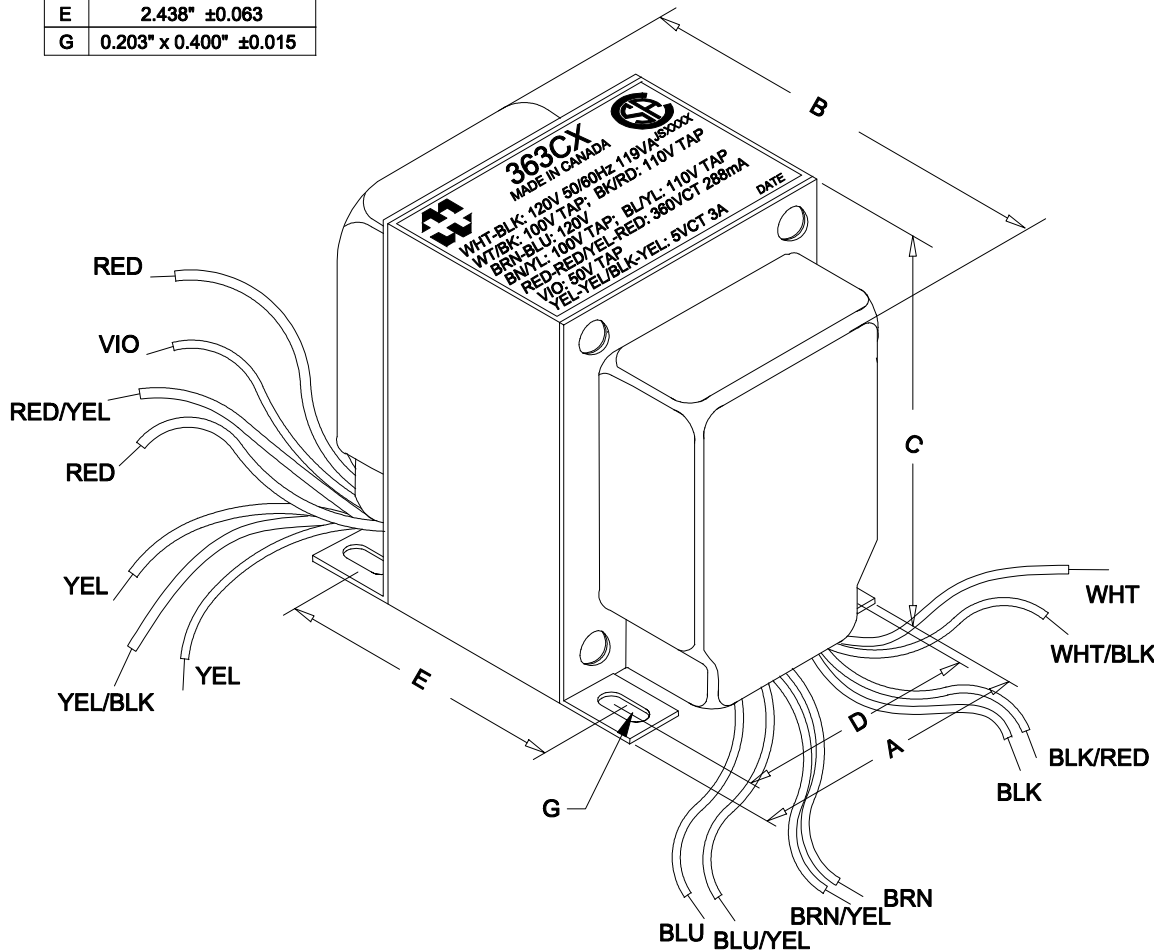

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

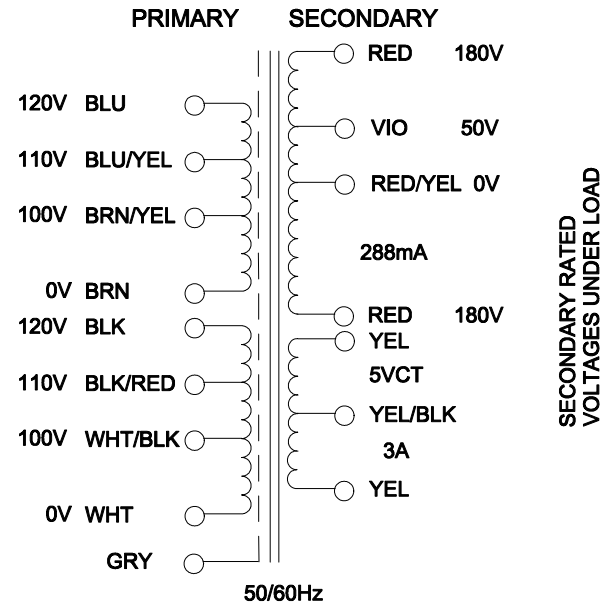

GRY - ELECTROSTATIC SHIELD

| ELECTRICAL DATA: | | |
|------------------|---------------------------------|---------------------|
| TESTS | CONDITIONS | ACCEPTANCE CRITERIA |
| lex | @ 120V, 60Hz, WHT - BLK | 220mA Max. |
| Sec. N.L.V | @ 120V, 60Hz, WHT - BLK | |
| | RED - RED = | 385.2V ±2% |
| | RED - RED/YEL = RED/YEL - RED = | 192.6V ±2% |
| | RED/YEL - VIO = | 50.08V ±2% |
| | YEL - YEL = | 5.378V ±2% |
| | YEL - YEL/BLK = YEL/BLK - YEL = | 2.689V ±2% |
| DCR | @ 20°C, WHT - BLK = | 5.943 Ω ±20% |
| | @ 20°C, BRN - BLU = | 6.401 Ω ±20% |
| | @ 20°C, RED - RED = | 46.21 Ω ±20% |
| | @ 20°C, YEL - YEL = | 0.069 Ω ±20% |
| HIPOT | PRIMARY - SECONDARY | 2500V, 60Hz, 1 SEC |

| REV.# | REVISION | DATE | HAMMOND ELECTRONIC DIVISION | |
|-------|-----------|---------------|---|----------------|
| 0 | RELEASED. | C.I. 08/09/12 | 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 | |
| | | | PH # (519) 886-6181 | |
| | | | FAX # (519) 886-9540 | |
| | | | DWG. BY: C. ILIE | CHK'D BY: |
| | | | DATE: 08/09/12 | APP'D. BY: |
| | | | DIMENSIONS: IN(X) MM() | |
| | | | TITLE: POWER TRANSFORMER | DWG. NO. 363CX |