


SCEP147H

SMD POWER INDUCTORS

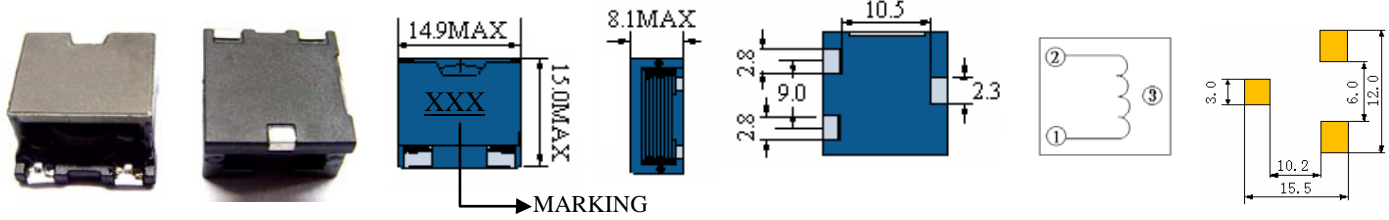



• Features

- 1 Excellent Power Density
- 2 Engineered to Provide High Efficiency



ELECTRICAL CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current ⁽³⁾ (A)	Temperature Current ⁽⁴⁾ (A)
SCEP147H-R30	0.3	100KHZ	2.10m	70.0	23.0
SCEP147H-R70	0.7	100KHZ	2.65m	46.4	20.0
SCEP147H-1R2	1.2	100KHZ	3.50m	35.7	19.5
SCEP147H-1R8	1.8	100KHZ	3.90m	29.6	16.5
SCEP147H-2R6	2.6	100KHZ	5.50m	24.4	14.0
SCEP147H-3R5	3.5	100KHZ	7.50m	20.8	13.5
SCEP147H-4R7	4.7	100KHZ	7.80m	17.6	11.5
SCEP147H-5R9	5.9	100KHZ	9.85m	16.4	10.5
SCEP147H-7R3	7.3	100KHZ	13.3m	14.6	9.00

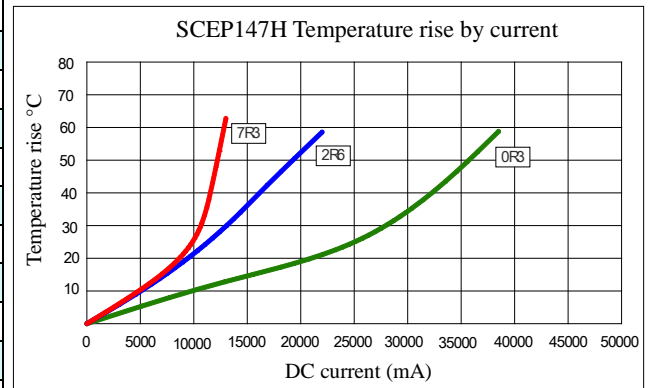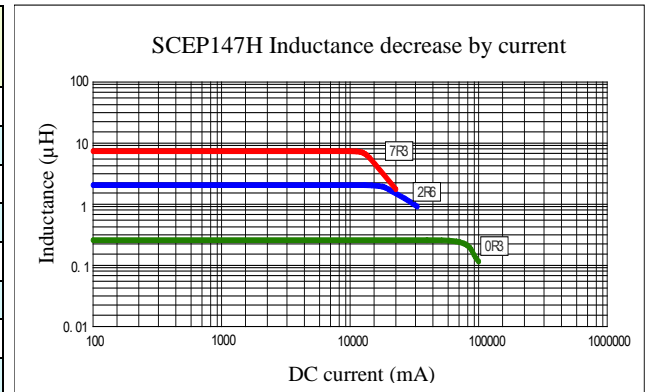

(1). Inductance tolerance for 0.3uH $\pm 30\%$, for 0.7uH-7.3uH: $\pm 20\%$. Tested at 0.25V, 0ADC and 25°C

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 25% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.