


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	B	ECR-07-020339		30AUG2007	RC	MS	

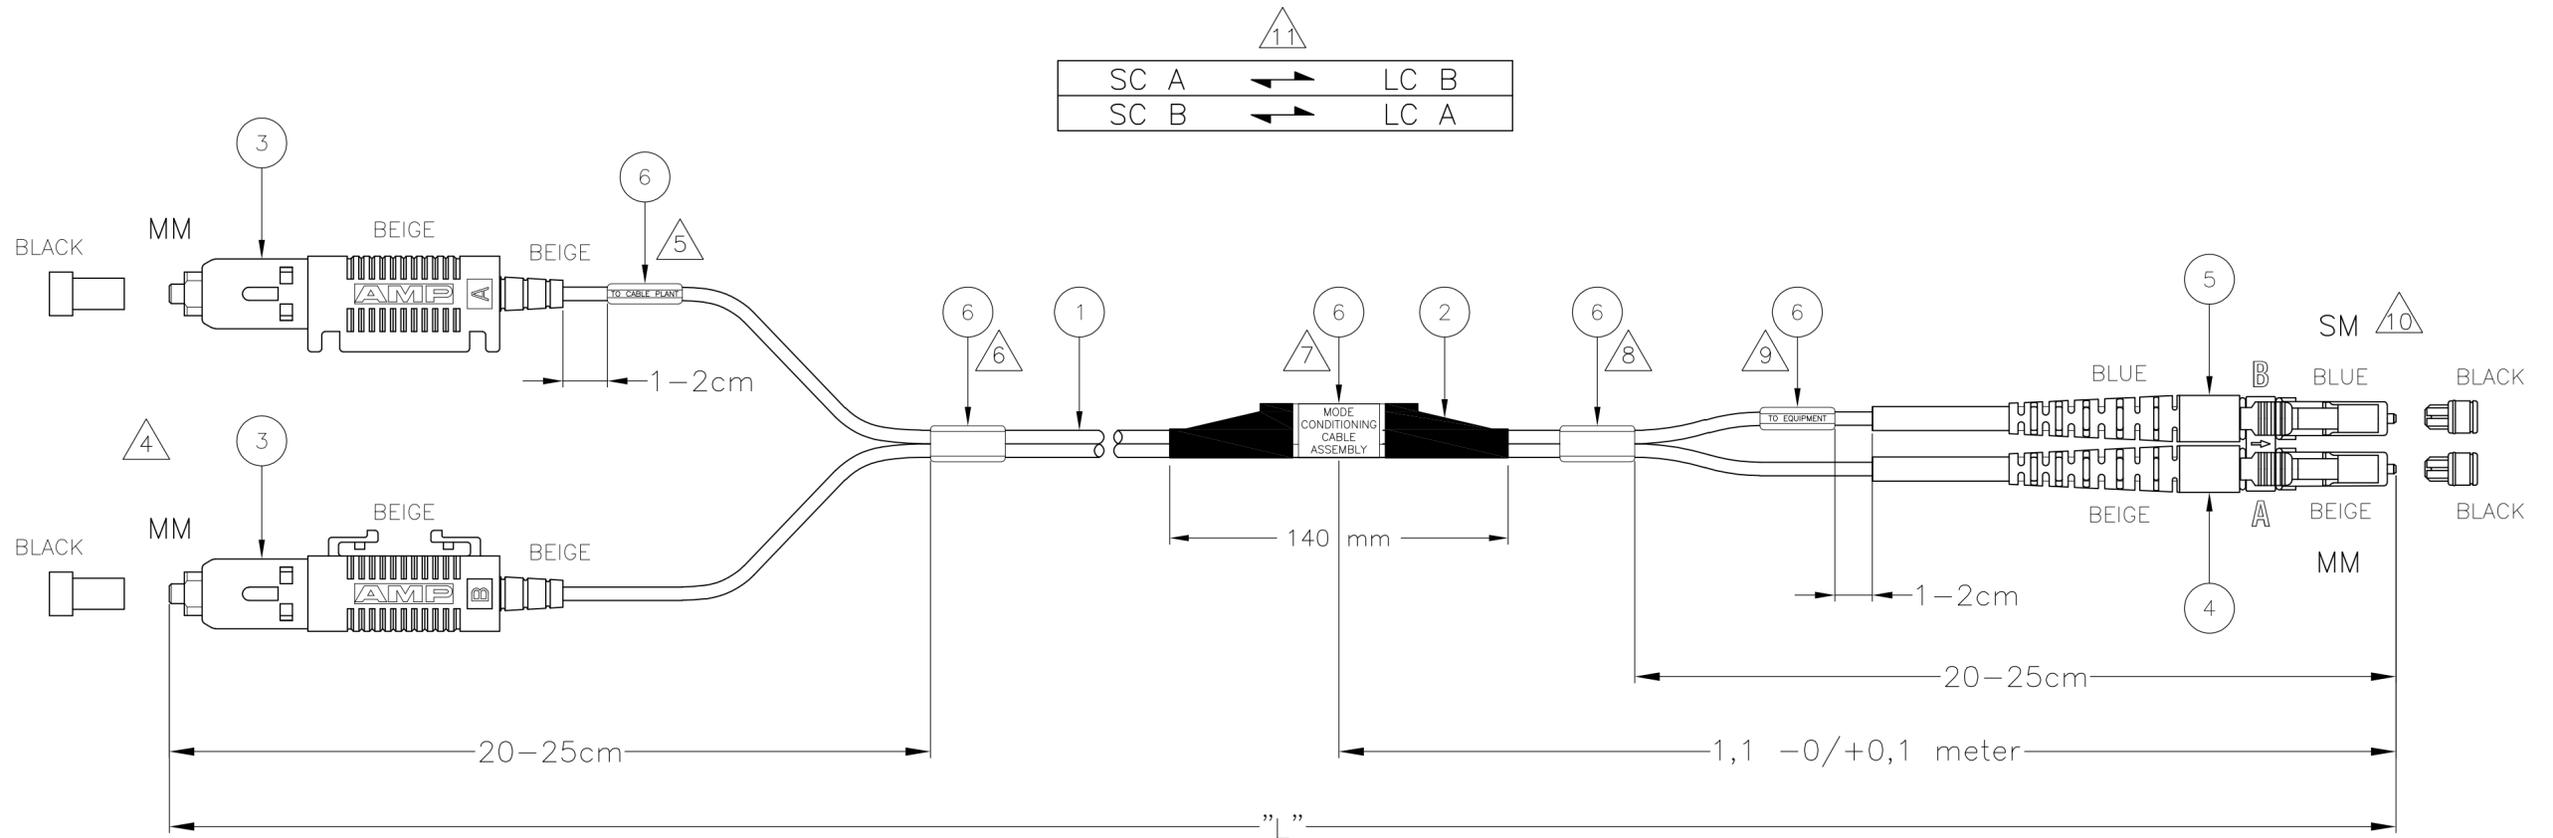

SC A	↔	LC B
SC B	↔	LC A

NOTES:

- CPR IS 34dB ACCORDING TO IEEE DRAFT P802.3Z/D5.0
- ATTENUATION ≤ 0,3dB, MEASURED AT 1300nm ACC. IEC 61300-3-4 METHOD B
- FILLED OUT TEST RESULT SHEET IS SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- INDIVIDUAL LENGTH DIFFERENCE ON SC SIDE ≤ 5mm
- TEXT ON CABLE LABEL: "TO CABLE PLANT"
- INFORMATION ON CABLE LABEL:
 - F.O. NUMBER
 - PRODUCTION DATE
- TEXT ON CABLE LABEL: "MODE CONDITIONING CABLE ASSEMBLY"
- INFORMATION ON CABLE LABEL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - TYCO ELECTRONICS PART NUMBER
 - MANUFACTURING LOCATION
 - PRODUCTION DATE
- TEXT ON CABLE LABEL: "TO EQUIPMENT"
- SINGLE MODE FIBER: POSITION B IN LC CONNECTOR
- CONNECTIVITY AS PER TABLE

PART NUMBER	"L" (meter)
6206821-2	2,2 -0/+0,1
6206821-3	3,2 -0/+0,1
6206821-4	4,2 -0/+0,1
6206821-5	5,2 -0/+0,1
6206821-6	6,2 -0/+0,1
6206821-7	7,2 -0/+0,1
6206821-8	8,2 -0/+0,1
6206821-9	9,2 -0/+0,1
1-6206821-0	10,2 -0/+0,1

Qty	Description	Item
5	FOAC CABLE LABEL	6
1	LC CONNECTOR SINGLE MODE, BLUE	5
1	LC CONNECTOR MULTI MODE, BEIGE	4
2	SC CONNECTOR MULTI MODE, DUPLEX HOUSING, BEIGE	3
1	CPR SLEEVE	2
1	FOCAB 2,5TZ 62.5/125 ORANGE LSZH	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 20SEP2006	Tyco Electronics Corporation 's-Hertogenbosch, Netherlands	
DIMENSIONS: mm		CHK A. HENGELMOLEN 20SEP2006	NAME FOGBIT62.5 MCLL 1,8MZ SC/PC DUPLEX - LC/PC DUPLEX	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. vd. MEULEN 20SEP2006	PRODUCT SPEC 108-19168	
0 PLC ± -		APPLICATION SPEC -		
1 PLC ± -		WEIGHT -		
2 PLC ± -		SIZE A2 CAGE CODE 00779 DRAWING NO C=6536811		
3 PLC ± -		RESTRICTED TO -		
4 PLC ± -		CUSTOMER DRAWING SCALE NTS SHEET 1 of 1 REV B		
ANGLES ± -				
FINISH -				